
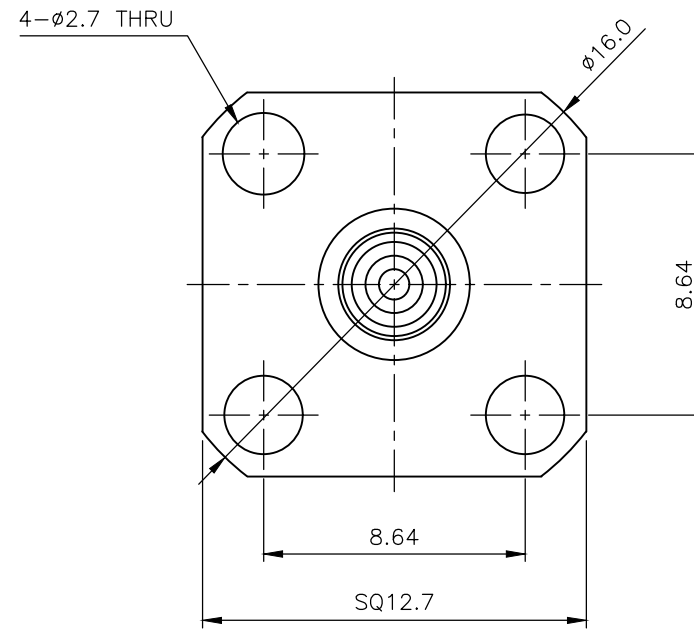


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			2000.12.22.

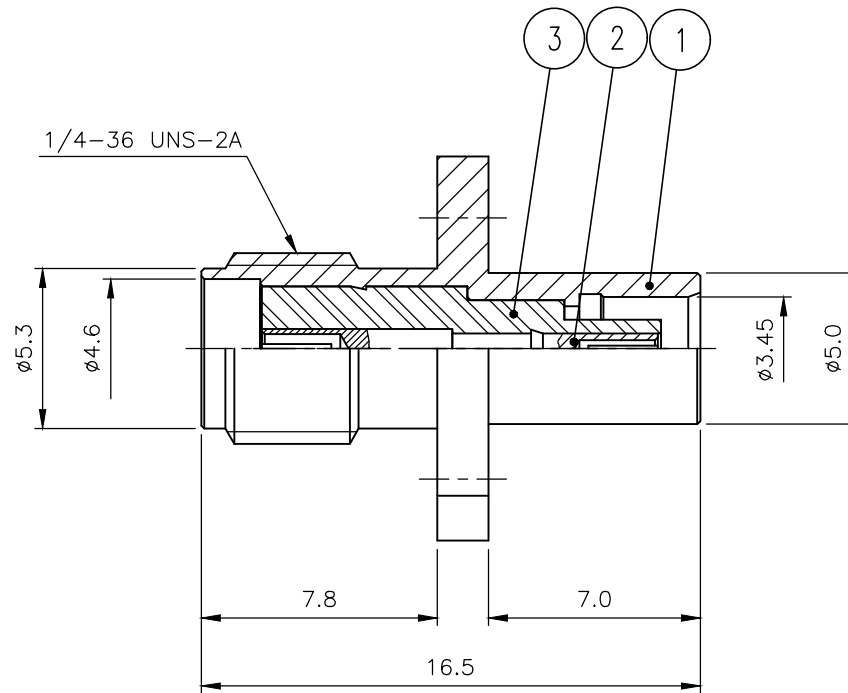

Electrical Data	Detail
Impedance	50 Ω
Frequency Range	0 to 6 GHz
Insulation Resistance	> 1000 MΩ
Voltage Rating	750 V RMS
Contact Resistance	Center:5.0 mΩ Max Outer:2.5 mΩ Max
VSWR	1.20 Max
Environmental Data	Detail
Temperature Range	-65°C to +165°C
Environmental Compliance	ROHS

3	INSULATOR	1	TEFLON		DAI00001-N/2
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00001-5/2
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DAD00319-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2000. 12. 22.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY					
MATERIAL _____		CHECKED BY			TITLE MCX50 (J) SMA50 (J) 4H		
		DRAWN BY					
FINISH _____		SCALE 4/1	UNIT mm		A4	DWG NO. AD00304-7/1	
						REVISION	I R