


AD00398-7/1

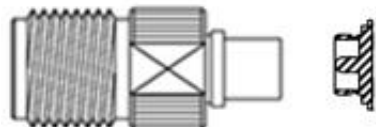

SMA (J) UFL (J)

ST L:14mm (MANUAL)

BODY/Nickel PIN/Gold

AD00398-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz	- 1.01, 1.02, 0.18
■ _2.0GHz	- 1.07, 1.08, 0.22
■ _3.0GHz	- 1.16, 1.17, 0.20

■ _4.0GHz	- 1.26, 1.28, 0.16
■ _5.0GHz	- 1.42, 1.44, 0.04
■ _6.0GHz	- 1.56, 1.62, 0.09
■ _7.0GHz	- 1.68, 1.72, 0.21
■ _8.0GHz	- 1.75, 1.74, 0.27

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

