
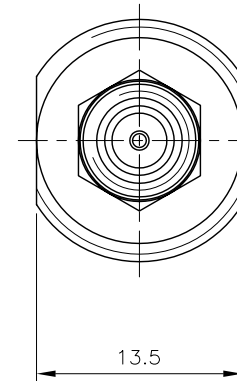



REVISION		
REV	DESCRIPTION	DATE
1R	최초개정	2009.04.01.

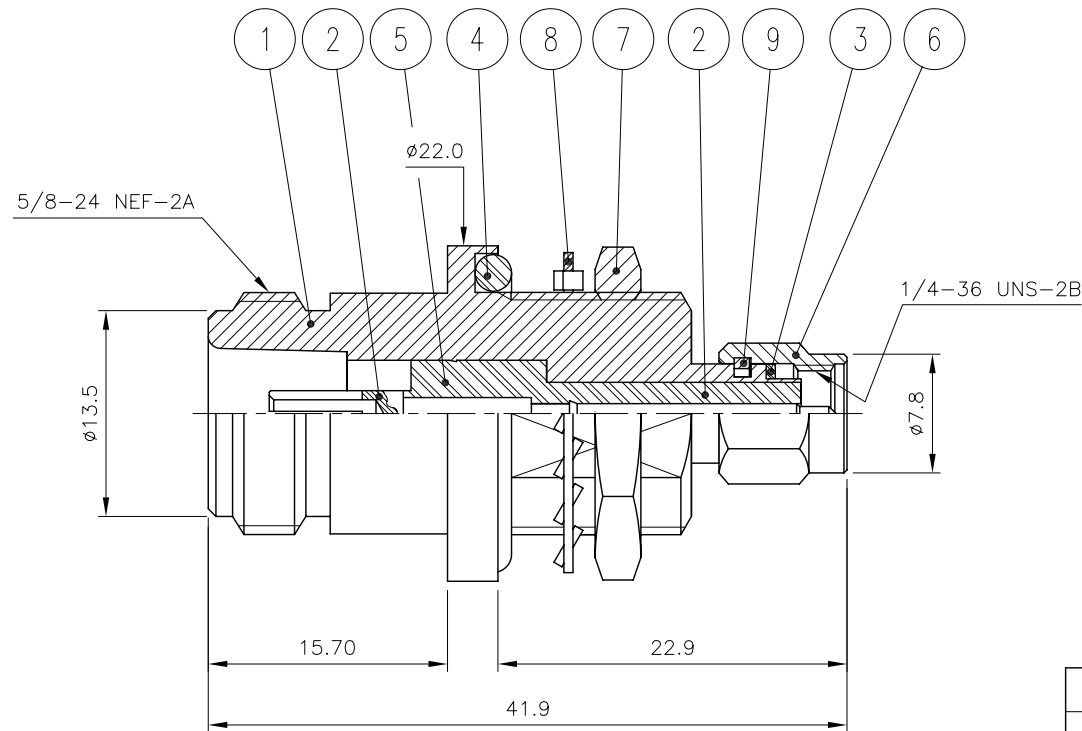

9	SPRING RING	1	Stainless steel	Passivated	DSR00002-5/1 (R2001)
8	WASHER	1	BsS	Nickel Plated	DWA00045-5/1 (Q8018)
7	NUT	1	BRASS	Nickel Plated	DNT00033-5/1 (N8001)
6	CAP	1	Stainless steel	Passivated	DCU00006-5/1 (K2004)
5	INSULATOR	1	PTFE		DAI00091-N/1
4	GASKET	1	NBR		DGK00046-N/1 (G8013)
3	GASKET	1	SILICONE RUB		DGK00004-N/1 (G2001)
2	CONTACT	1	Beryllium copper	Gold Plated	DAC00164-5/1
1	BODY	1	Stainless steel	Passivated	DAD00157-N/1
NO.	DESCRIPTION	QTY	MATERIAL	PLATING	CODE

ELECTRICAL SPEC.

1. Impedance : 50 ohm (Nominal)
2. Frequency Range : DC ~ 18 GHz



Recommended Panel Configuration

TOLERANCE	Decimal	DATE 2009. 04. 01.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	S.J.YOUN					
	±1°	CHECKED BY	E.H.KIM					
MATERIAL		DRAWN BY		I.C.KIM		TITLE N50(J) – SMA(P) B/H ADAPTOR		
FINISH		SCALE	UNIT		A4			
		4/1	mm				DWG NO.	AD00401-7/1
					REVISION	I R	SHEET	1 of 1