



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024.09.20.

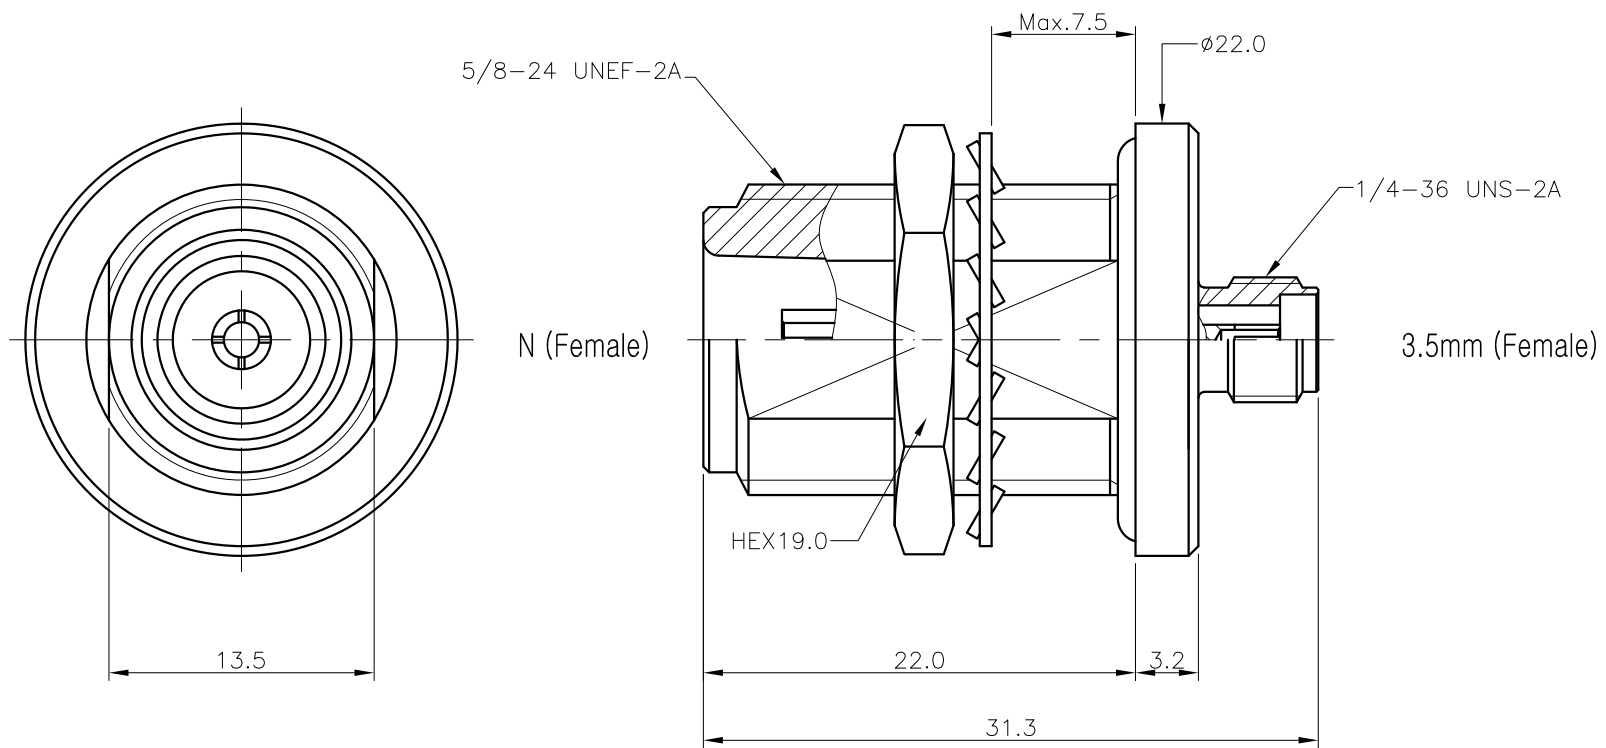

SPECIFICATIONS

- 1. IMPEDANCE : 50Ω (Nominal)
- 2. FREQUENCY RANGE : DC ~ 11GHz
- 3. V.S.W.R : 1.2 : 1 max
- 4. Voltage rating : 500 Vrms
- 5. Dielectric Withstanding Voltage : 1500 Vrms
- 6. Temperature range : -45°C ~ +155°C
- 7. Durability : 500 Cycles

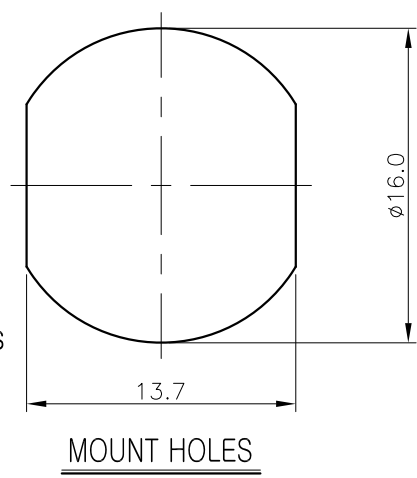

6	WASHER	1	Stainless steel	Passivated	DWA00050-5/1
5	NUT	1	Stainless steel	Passivated	DNT00066-5/1
4	GASKET	1	SILICONE RUB		DGK00045-N/1
3	INSULATOR	1	TEFLON		DAI00106-N/2
2	CONTACT	1	BeCu C17300	Gold Plated	DAC03423-5/1
1	BODY	1	Stainless steel	Passivated	DAD00476-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2024. 09. 20.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY					
MATERIAL -		CHECKED BY		TITLE N50 (J) SMA50(3.5mm) (J) BH ADAPTOR			
		DRAWN BY S.H.KIM					
FINISH -		SCALE 2.5/1	UNIT mm		A4	DWG NO. AD00424-7/4	
						REVISION I R	SHEET 1 of 1