


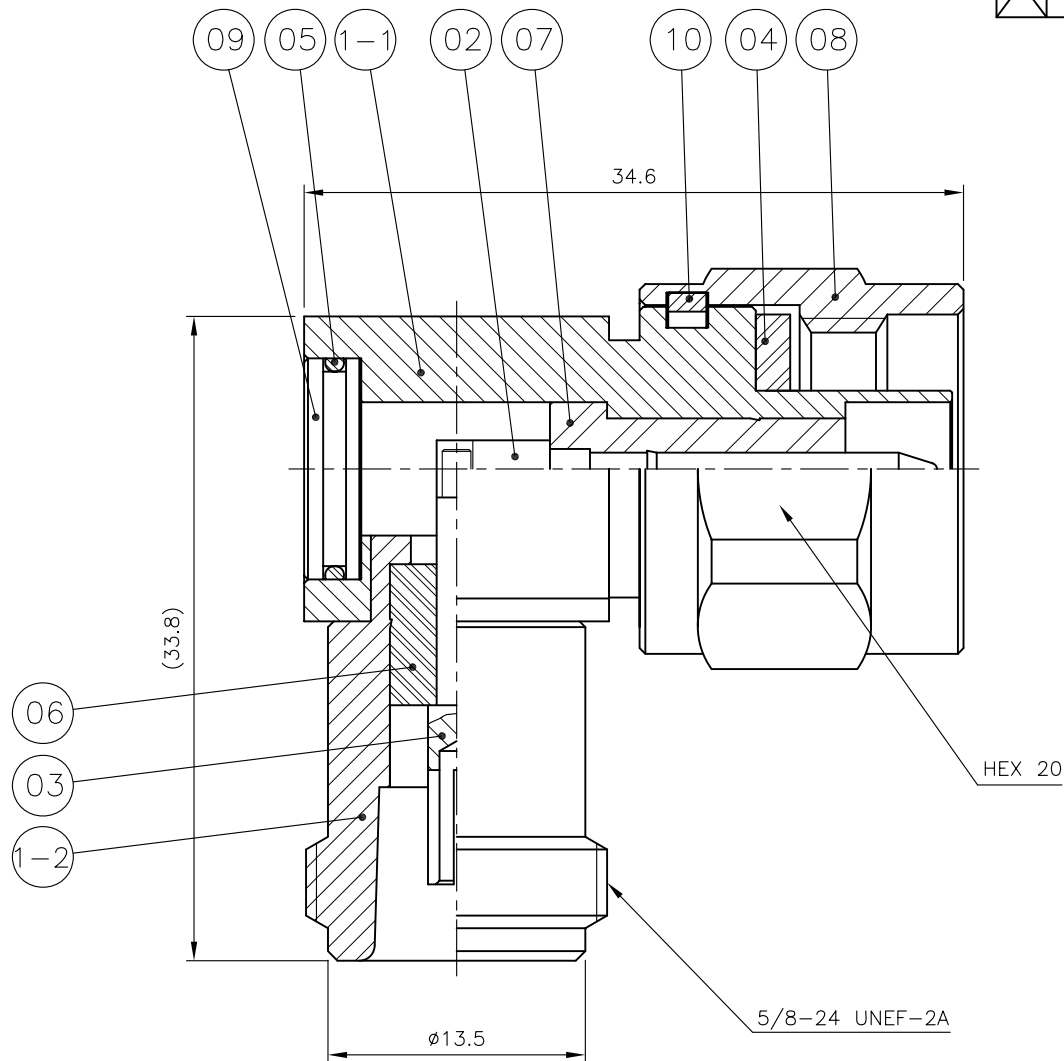

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	M.H.SONG	I.C.KIM	2013.09.27.

* ELECTRICAL DATA

1	Frequency range	DC ~ 6 GHz	
2	IMPEDANCE	50Ω NOMINAL	
3	V.S.W.R	1.2 : 1 max	
4	Insertion Loss	-0.15dB min	
5	PIMD (-43dBm / 2 tone)	CDMA (869~894MHz)	-150dBc max
		WCDMA (2110~2170MHz)	-150dBc max

10	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
9	COVER	1	MBsBD	SUCO Plate	DCO00090-5/2
8	CAP	1	MBsBD	SUCO Plate	DCU00063-5/1
7	INSULATOR	1	TEFLON		DIN01803-N/1
6	INSULATOR	1	TEFLON		DIN00643-N/1
5	GASKET	1	NBR		DGK00176-N/1
4	GASKET	1	SILICONE RUB		DGK00013-N/1
3	CONTACT	1	BeCu	Silver 3.0μm	DCT02294-5/2
2	CONTACT	1	MBsBD	Silver 3.0μm	DCT02293-5/2
1	1-2 BODY (B)	1	MBsBD	SUCO 3.0μm	DBD02780-3/1
	1-1 BODY (A)	1	MBsBD	SUCO 3.0μm	DBB00265-5/2 DBD02779-3/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 09. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	E.H.KIM	TITLE N50 (J) N50 (P) RA ADAPTOR
		DRAWN BY	M.H.SONG	
FINISH		SCALE	UNIT	A4 DWG NO. AD00435-7/2 REVISION I R SHEET 1 of 1
		3/1	mm	