


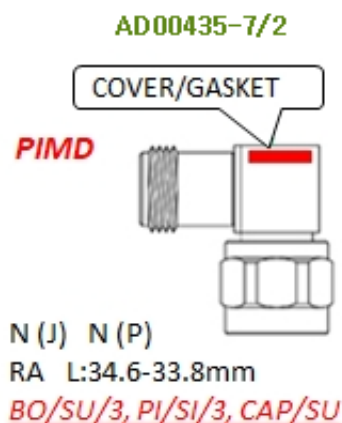

AD00435-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz - 1.02, 1.02, 0.00
■ _2.0GHz - 1.08, 1.07, 0.03
■ _3.0GHz - 1.12, 1.12, 0.05
■ _4.0GHz - 1.08, 1.08, 0.09
■ _5.0GHz - 1.11, 1.19, 0.30

■ _6.0GHz - 1.04, 1.09, 0.22
■ _7.0GHz - 1.10, 1.10, 0.11
■ _8.0GHz - 1.15, 1.43, 0.55

► NETWORK ANALYZER

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

► Test cable

- N Male to N Male
- 10GHz Cable (CF00539-7/1)

► Test Adaptor

- N (J) N (J) AD00379-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

