


AD00470-7/2

AD00470-7/2

**S11/S22/S21
(SWR,SWR,dB)**

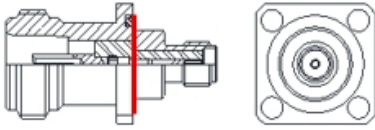

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

■_0.5GHz	-	1.04,	1.04,	0.03
■_1.0GHz	-	1.04,	1.04,	0.01
■_2.0GHz	-	1.04,	1.04,	0.07
■_3.0GHz	-	1.07,	1.07,	0.10
■_4.0GHz	-	1.02,	1.02,	0.14
■_5.0GHz	-	1.17,	1.20,	0.28
■_6.0GHz	-	1.15,	1.05,	0.37
■_7.0GHz	-	1.05,	1.06,	0.32
■_8.0GHz	-			
■_MaX_	-	1.21,	1.21,	0.43

N (J) SMA (J) 4 HOLE
□17.5-12.7-3.2
L:31mm (16.2-2.5-12.3)
BODY/Nickel PIN/Gold

► **NETWORK ANALYZER**

► **Test cable**

► **Test Adaptor**

- ☒ E5071B (~8.5GHz)
- ☐ ZND (~8.5GHz)
- ☐ ZVA50 (~50GHz)

- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☐ 2.4mm Male to 2.4mm Male
50GHz Cable)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

