
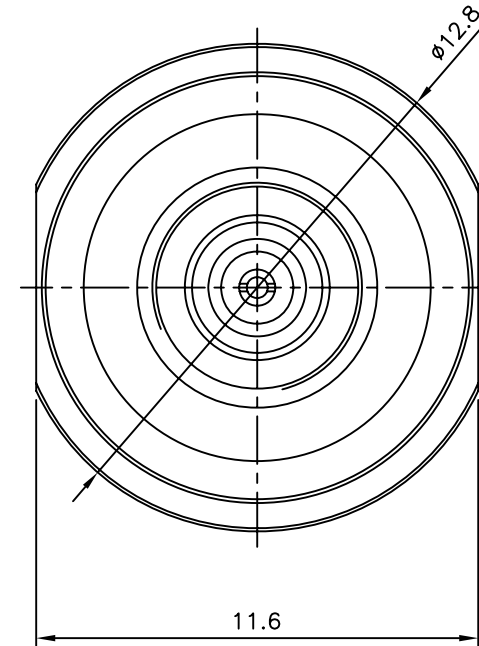


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.11.24.

7/16-28 UNEF-2A


1/4-36 UNS-2A

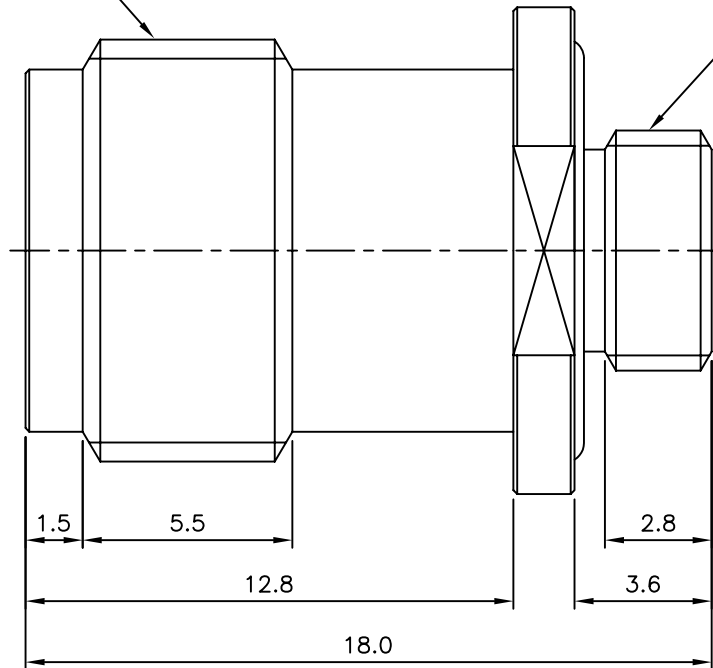

► ELECTRICAL SPECIFICATIONS

Frequency	DC~2,000MHz
V.S.W.R	1.2 : 1 (Max)
Insertion Loss	-1.0dB (Min)
Impedance	50Ω (Nominal)

5	GASKET	1	SILICONE		DGK00283-N/1
4	INSULATOR	1	TEFLON		DAI00136-N/2
3	INSULATOR	1	TEFLON		DAI00136-N/1
2	CONTACT	1	BeCu KS D 5102 C1720	Gold Plate (1.27μm)	DAC00249-5/1
1	BODY (A)	1	MBsBD KS D 5101 C3604	Gold Plate (0.5μm)	DAD00249-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 11. 24.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY	I.C.KIM				
MATERIAL	±1°	CHECKED BY	TITLE MCX50 (J) TNC50 (J) ST ADAPTOR				
	_____	DRAWN BY				S.Y.EUN	
FINISH	_____	SCALE	UNIT	A4	DWG NO.	AD00483-7/3	
	_____	5/1	mm			REVISION	I R