


AD00534-7/3



PDM (J) SMA (J)
PANEL LOCK □11.6/10.5
L:34.2mm
BODY/Nickel, PIN/Gold

AD00534-7/3

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	-	1.04,	1.04,	0.04
■_2.0GHz	-	1.01,	1.01,	0.08
■_3.0GHz	-	1.01,	1.02,	0.11
■_4.0GHz	-	1.06,	1.04,	0.12
■_5.0GHz	-	1.09,	1.07,	0.16
■_6.0GHz	-	1.08,	1.05,	0.14
■_7.0GHz	-	1.15,	1.14,	0.17
■_8.0GHz	-	1.16,	1.17,	0.16

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- E5071B (~8.5GHz)

□ ZVA50 (~50GHz)


■ ZND (~8.5GHz)

■ N Male to SMA Male


10GHz Cable (CF00540-7/1)

AD00534-7/3

AD00292-7/2

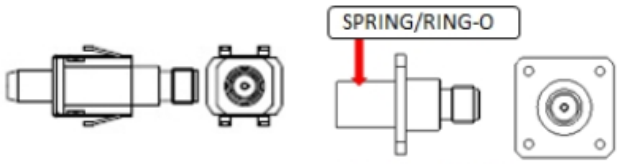

7/17/2020 5:37:33 AM
1328.5170K92-102136-V/a

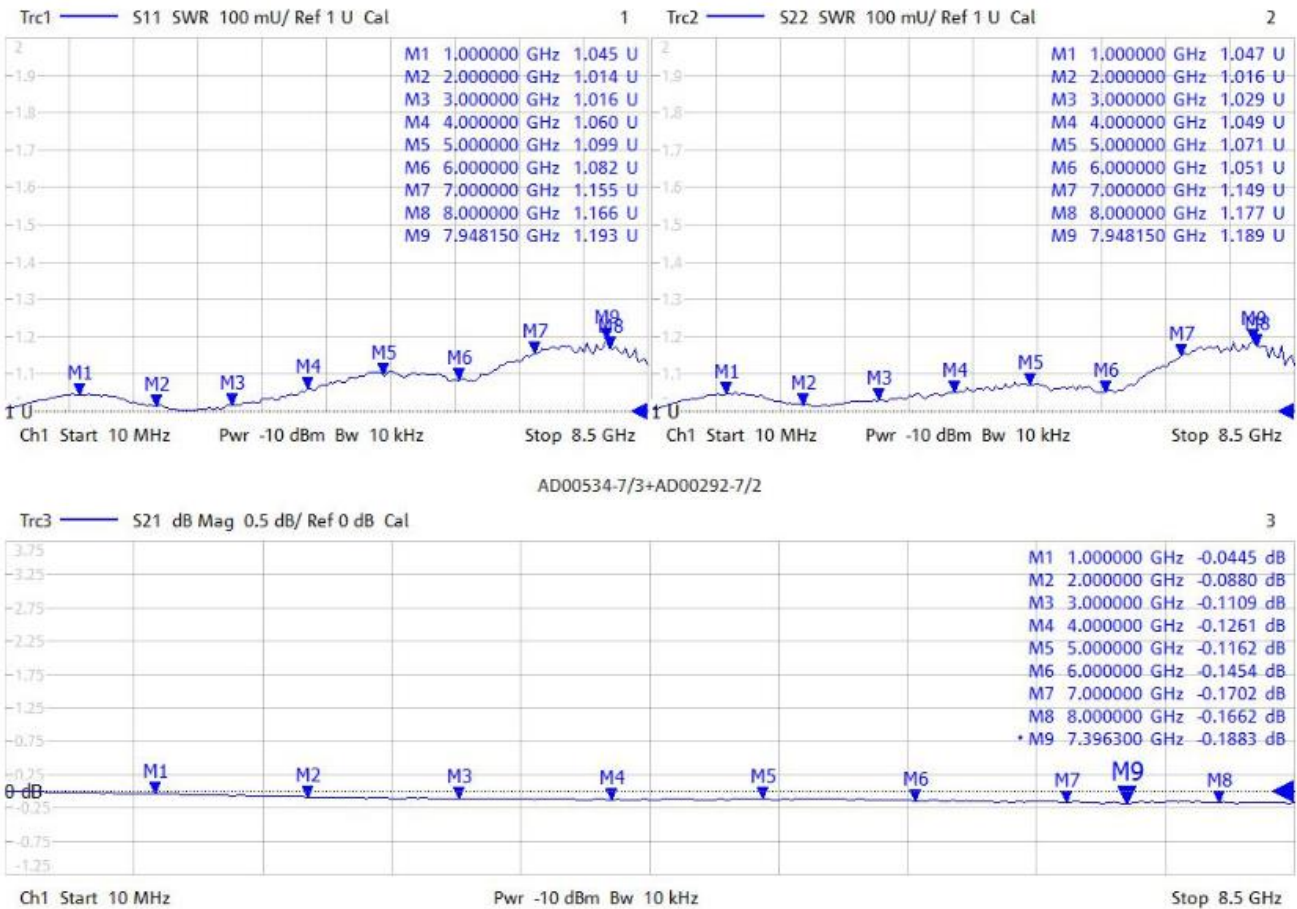

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)