

AD00570-7/1


AD00570-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1GHz - 1.00, 1.01, 0.02
■_3GHz - 1.03, 1.04, 0.03
■_6GHz - 1.05, 1.04, 0.05
■_8GHz - 1.04, 1.03, 0.05
■10GHz - 1.13, 1.13, 0.07

■12GHz - 1.21, 1.21, 0.09
■14GHz - 1.22, 1.21, 0.10
■16GHz - 1.22, 1.21, 0.09
■18GHz - 1.35, 1.35, 0.16
■MaX___- 1.35, 1.35, 0.16

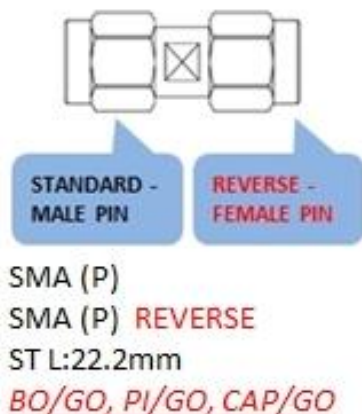

► NETWORK ANALYZER

► Test cable




► Test Adaptor

□ E5071B (~8.5GHz)

■ 2.4mm Male to 2.4mm Male
50GHz Cable

■ AD00644-7/2 *2ea
2.92mm (J) to 2.92mm(J)

■ ZVA50 (~50GHz)

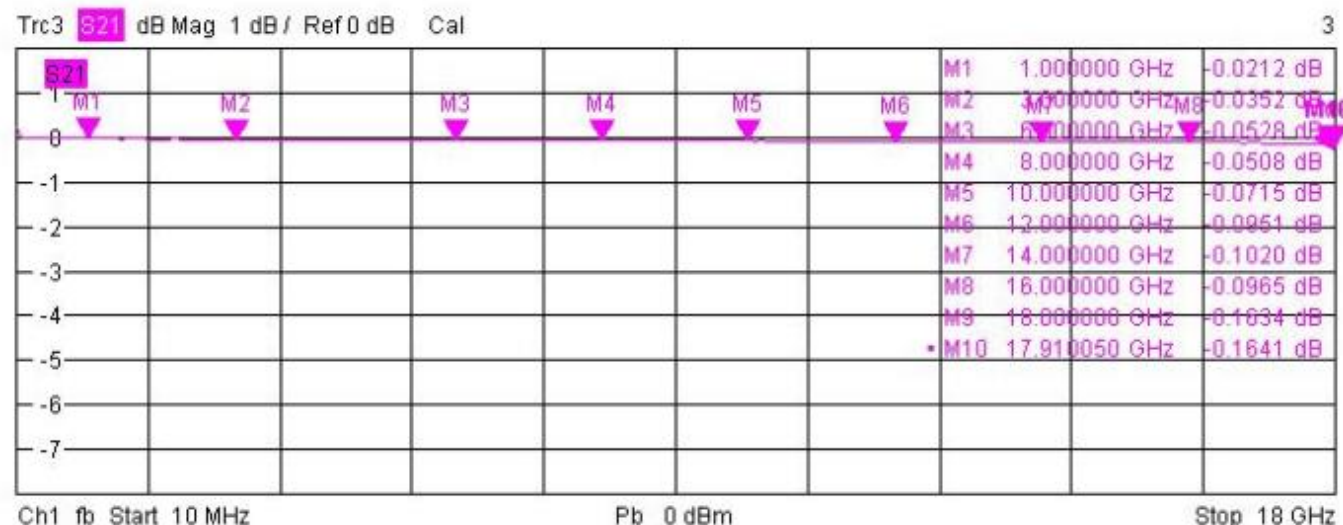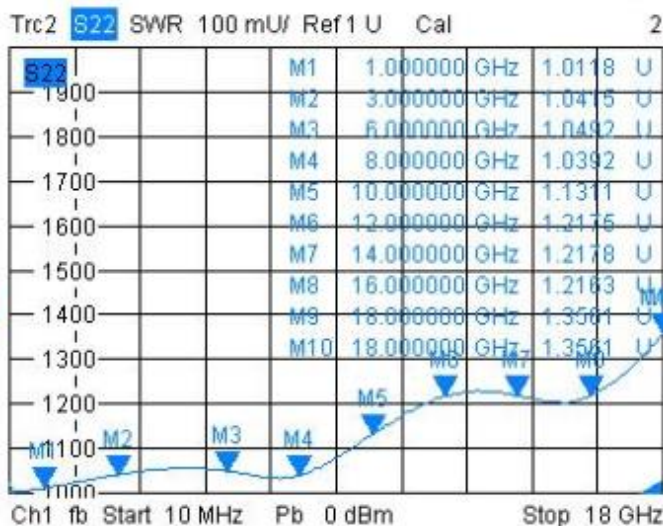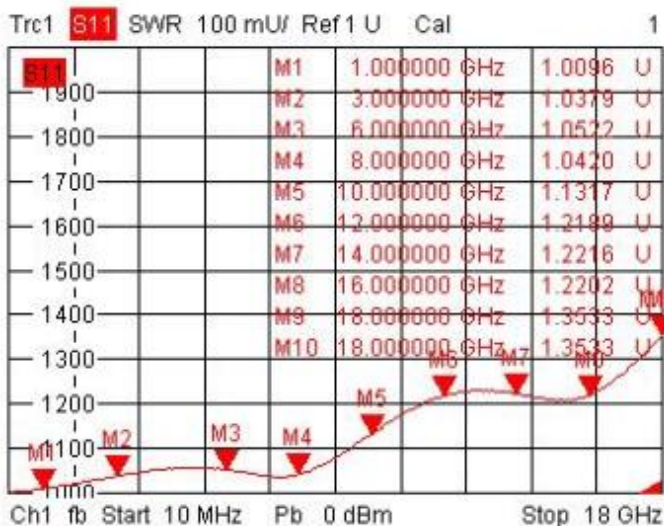

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)