
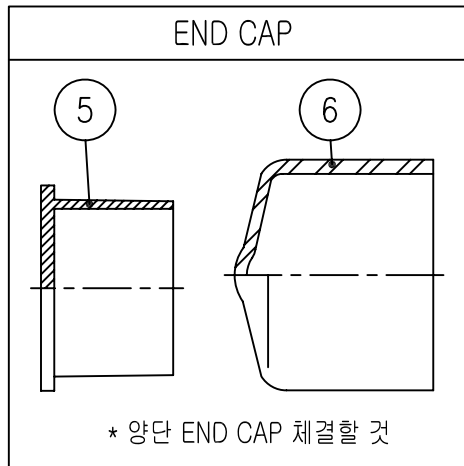


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.05.16.

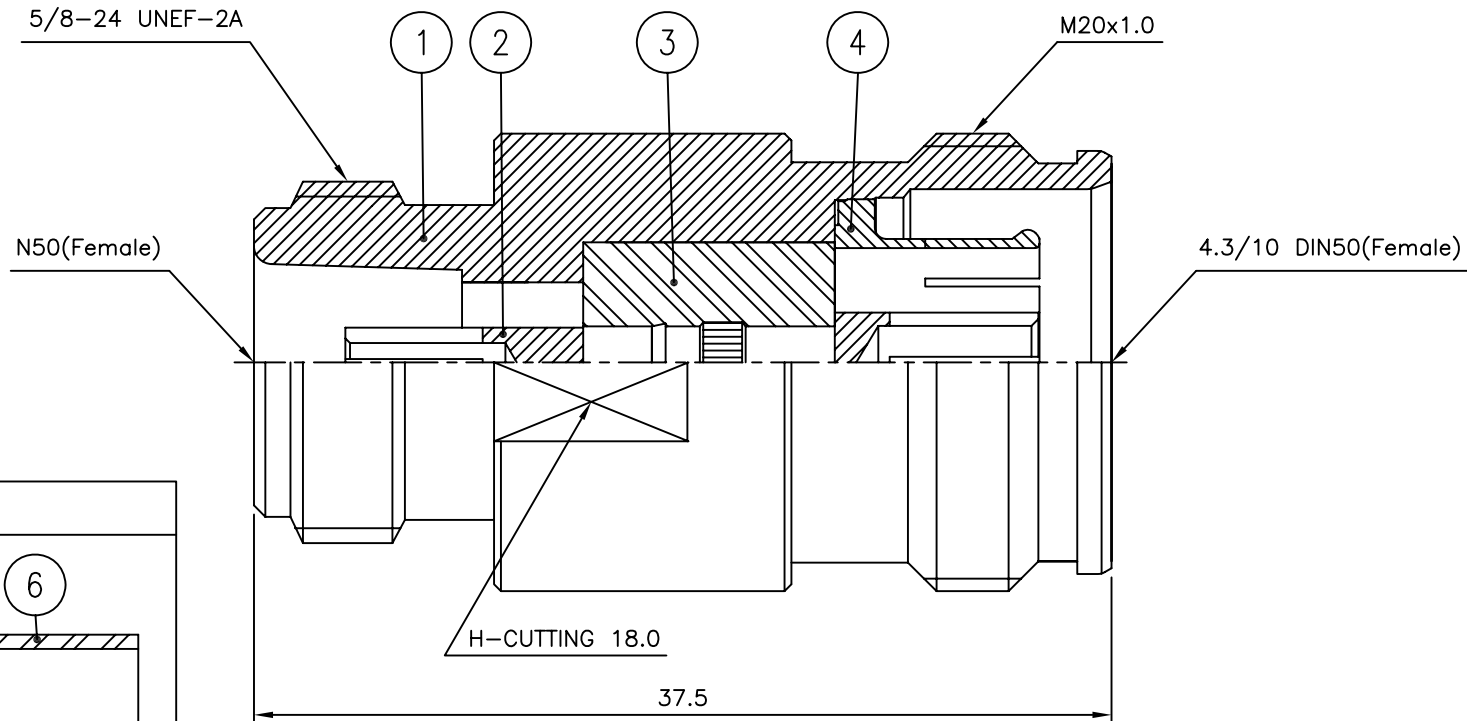

6	END CAP (4.3/10)	1	PVC	RED	DGK00224-N/3
5	END CAP (N)	1	Plastic	White	DGK00114-N/1
4	JACK	1	MBsBD C3604BD-F	Silver Plate (3μm)	DJA00228-5/6
3	INSULATOR	1	TEFLON		DIN02767-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (5μm)	DAC03256-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DAD00313-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

* 전기적 특성

1	Frequency range	DC ~ 3000MHz
2	Impedance	50ohm NOMINAL
3	V.S.W.R	1.2 : 1 (Max)
4	Insertion loss	-0.2dB (Min)
5	PIMD (-43dBm / 2 tone)	CDMA/WCDMA 3차: -155dBc (Min)

TOLERANCE	Decimal ±0.2	DATE 2016. 05. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 4.3/10 DIN50 (J) N50(J) ADAPTOR
		DRAWN BY	H.J.LEE	
FINISH		SCALE 3/1	UNIT mm	DWG NO. AD00582-7/1 REVISION I R SHEET 1 of 1

A4