


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2019.11.21.
2	[실변처리No.202310-0001] 절연체 길이 변경 (조립시 들어남->핀높이 불량 개선)	S.H.KIM		2023.10.19.

5/8-24 UNEF-2A

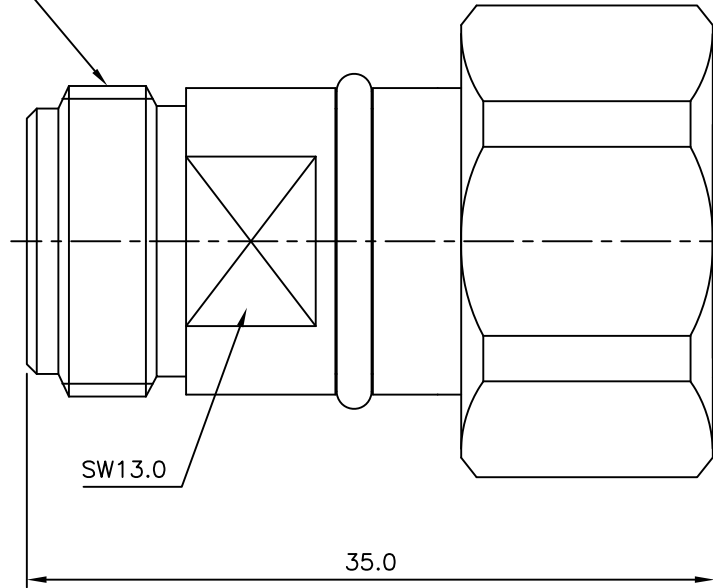


SW13.0

35.0

* 전기적 특성

1	Frequency range	DC ~ 6GHz	
2	Impedance	50ohm NOMINAL	
3	V.S.W.R (Max.)	1.2 @ 3GHz , 1.3 @ 6GHz	
4	Insertion loss (Min.)	-0.2dB	
5	PIMD (-43dBm / 2 tone)	CDMA/WCDMA	3차: -160dBc (Max)

7	END CAP	1	ABS(White)		DGK00114-N/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02282-5/1
5	GASKET	1	SILICONE RUB		DGK00036-N/1
4	GASKET	1	SILICONE RUB		DGK00121-N/1
3	INSULATOR	1	TEFLON		DIN03097-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (3μm)	DAC03260-5/3
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DAD00320-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2019. 11. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM		
MATERIAL _____	CHECKED BY	TITLE 4.3/10 DIN50 (P) N50(J) ADAPTOR			
	DRAWN BY				
FINISH _____	SCALE 2.5/1	UNIT mm		A4	DWG NO. AD00588-7/3
					REVISION 1