


■ VSWR ~6GHz 1.2:1  
■ PIMD -160 dBc



4.3/10 DIN (P) N (J) ST  
L:47.7mm  
BODY/SUCO/3 PIN/Silve/5  
HEX-CAP/BR/NI

## AD00588-7/4

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

■ VSWR ~6GHz ~1.15:1  
■ PIMD -160 dBc

### ► NETWORK ANALYZER


### ► Test cable

### ► Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZND (~8.5GHz)
- ☐ ZVA50 (~50GHz)

- ☒ N Male to SMA Male  
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male  
10GHz Cable (CF00539-7/1)
- ☐ 2.4mm Male to 2.4mm Male  
50GHz Cable )

8/21/2023 12:32:18 PM  
1328.5170K92-102136-Va

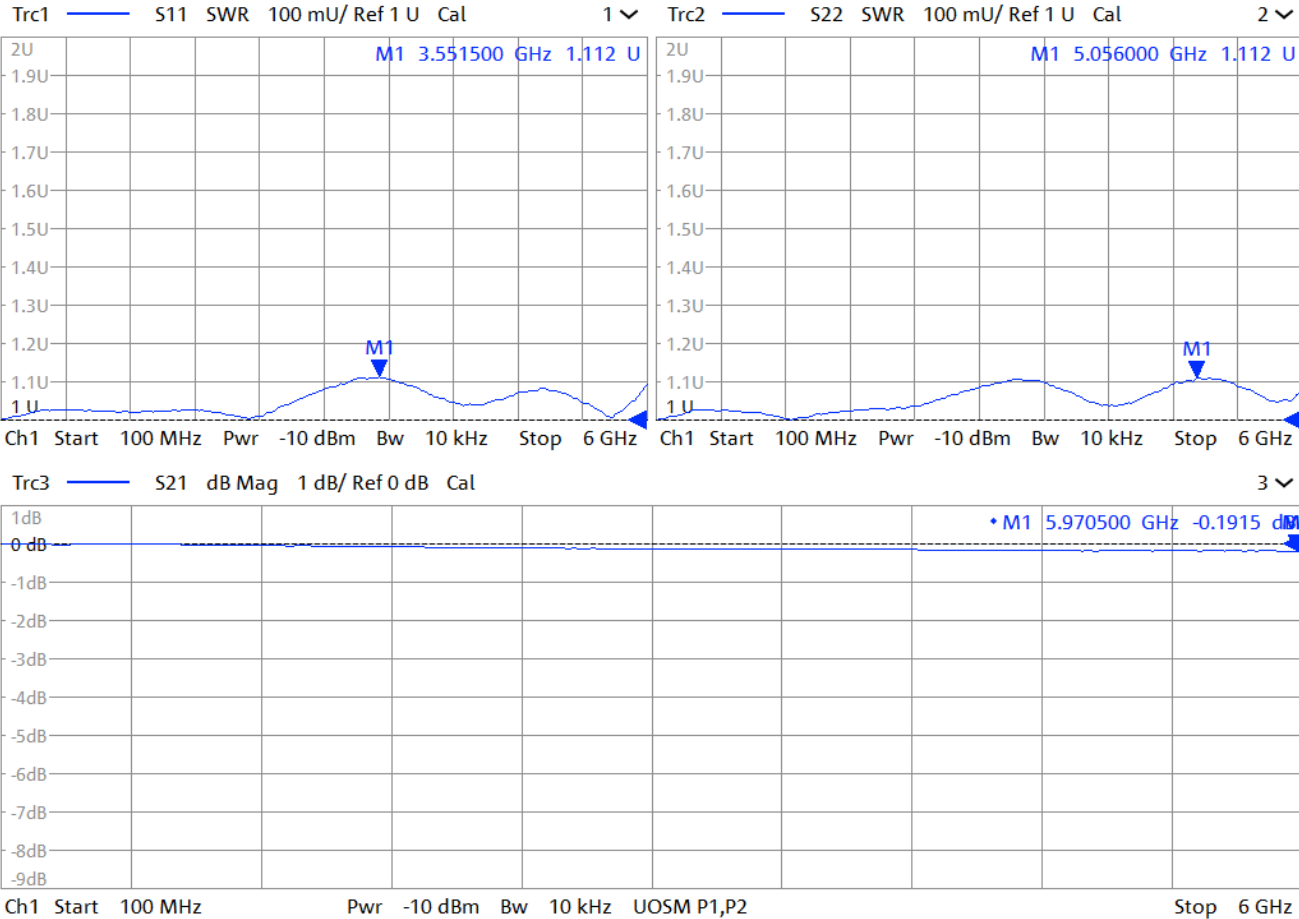

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)