


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	G.Y.KIM	I.C.KIM	2017.01.18.

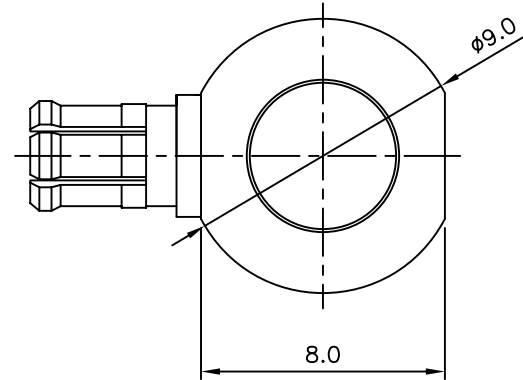

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -40°C ~ +85°C


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm

2. FREQUENCY RANGE : DC~3GHz

3. VSWR (Max) : 1.2

4. INSERTION LOSS (Max) : 0.2dB

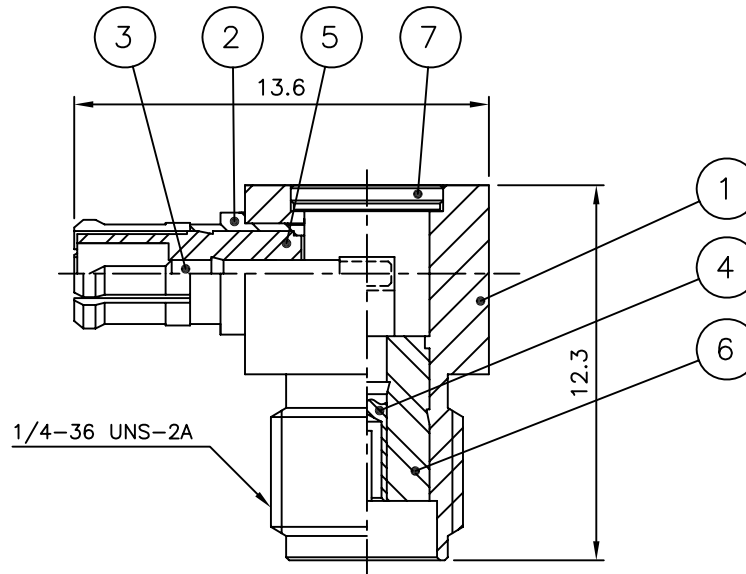

7	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00026-5/2
6	INSULATOR	1	TEFLON		DIN02875-N/1
5	INSULATOR	1	TEFLON		DIN02874-N/1
4	CONTACT (B)	1	BeCu C17300	Gold Plate	DCT03809-5/1
3	CONTACT (A)	1	MBsBD C3604BD-F	Gold Plate	DCT03808-5/1
2	BODY (B)	1	BeCu C17300	Gold Plate	DBD04284-5/1
1	BODY (A)	1	MBsBD C3604BD-F	Gold Plate	DBD04283-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

*조립방법

1. ①번 BODY(A)에 ②번 BODY(B)를 조립한다.
2. BODY에 ⑤번, ⑥번 TEFLON을 각각 조립한다.
3. BODY에 ④번 PIN을 조립한 후 드라이버로 방향을 맞춘다.
4. BODY에 ③번 PIN을 조립한다.
5. ③번, ④번 조립된 PIN에 SOLDER 작업한다.
6. ⑦번 COVER을 BODY에 결합한다.

TOLERANCE	Decimal	DATE 2017. 01. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY	C.K.KIM	TITLE MCX50 (P) SMA50 (J) RA Adaptor
		DRAWN BY	G.Y.KIM	
FINISH	-	SCALE	4/1	DWG NO. AD00598-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	