


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2017.04.10.
1	설면처리(No.201803-0008) 상대품 체결시 가스켓 눌림현상 없음-바디,캡 수정	S.Y.EUN	I.C.KIM	2018.04.03.

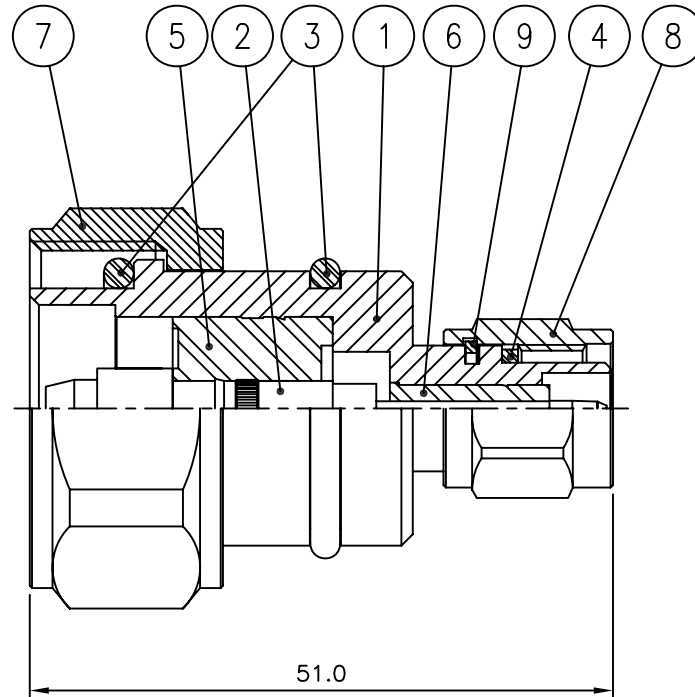

* 전기적 특성

1	Frequency range	DC ~ 3000MHz	
2	Impedance	50ohm NOMINAL	
3	V.S.W.R	1.2 : 1 (Max)	
4	Insertion loss	-0.2dB (Min)	
5	PIMD (-43dBm / 2 tone)	CDMA (869~894MHz)	3차: -160dBc (Max)

9	SPRING RING	1	SUS304	Passivate	DSR00024-5/1
8	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00135-5/6 DCU00135-5/1
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00078-5/2
6	INSULATOR	1	TEFLON		DIN02893-N/1
5	INSULATOR	1	TEFLON		DIN01700-N/1
4	GASKET	1	SILICONE RUB		DGK00008-N/1
3	GASKET	2	SILICONE RUB		DGK00054-N/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate	DAC03270-5/1
1	BODY	1	MBsBD C3604BD-F	Suco Plate	DAD00332-5/2 DAD00332-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2018. 04. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	I.C.KIM		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 (P) TNC50 (P) ADAPTOR	
		DRAWN BY	S.Y.EUN		
FINISH		SCALE 1.5/1	UNIT mm		DWG NO. AD00605-7/1 REVISION 1 SHEET 1 of 1