


2-M20x1.0

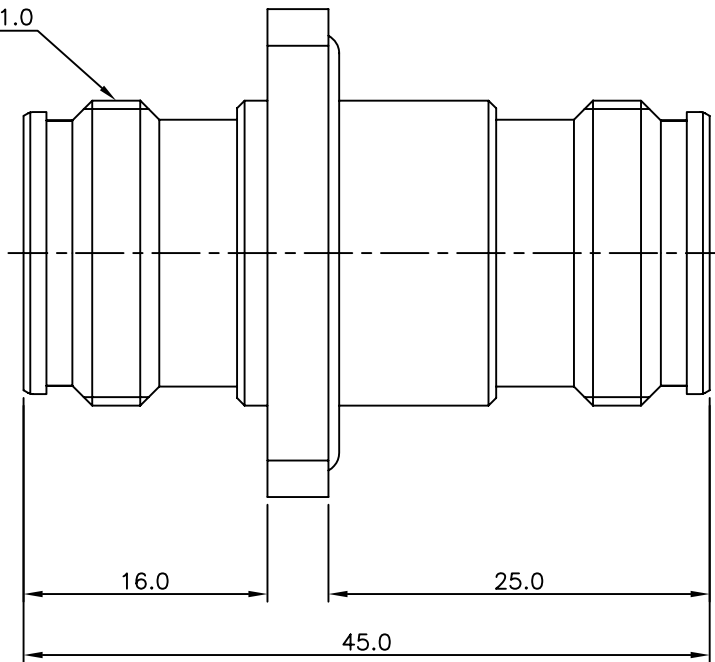


* 전기적 특성

1	Frequency range	DC ~ 3000MHz
2	Impedance	50ohm NOMINAL
3	V.S.W.R	1.2 : 1 (Max)
4	Insertion loss	-0.2dB (Min)
5	PIMD (-43dBm / 2 tone)	3차: 155dBc (Min)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2017.04.27.

4- ϕ 3.2 THRU

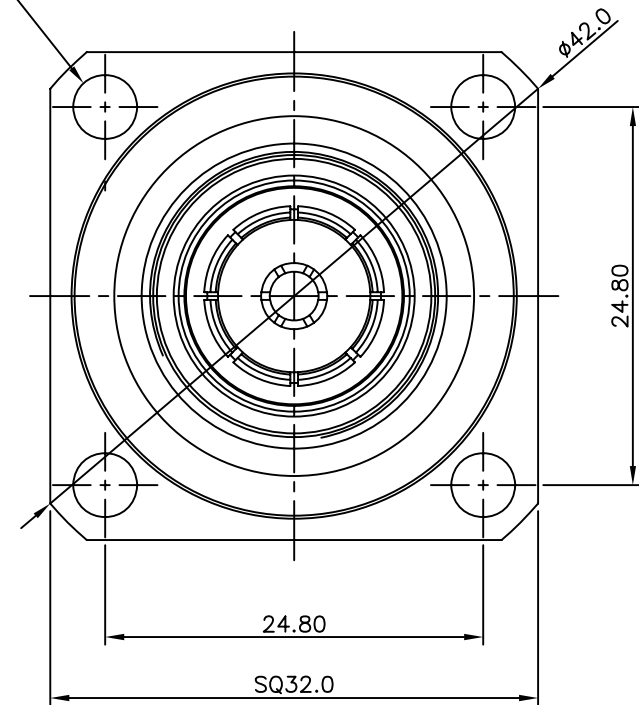

6	JACK	2	MBsBD C3604BD-F	이원합금(Ni/Tin)	DJA00228-5/7
5	INSULATOR	1	TEFLON		DIN02393-N/1
4	GASKET	1	SILICONE RUB		DGK00055-N/1
3	CONTACT	2	BeCu C17300	Silver Plate (3 μ m)	DCT03833-5/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3 μ m)	DCT03834-5/1
1	BODY	1	MBsBD C3604BD-F	이원합금(Ni/Tin)	DAD00338-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 04. 27	
	Angle	APPROVED BY	
MATERIAL		CHECKED BY	
		DRAWN BY	I.C.KIM
FINISH		SCALE	UNIT
		2/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE 4.3/10 DIN(J) 4.3/10 DIN(J) 4H
ADAPTOR

DWG NO.	AD00610-7/1		
REVISION	I R	SHEET	1 of 1

A4