


AD00674-7/2

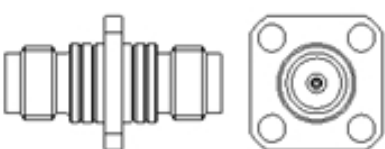

1.85mm (J) 1.85mm (J)

4 HOLE □12.7-8.64-2.6

L:20.85mm(9.6-1.65-9.6)

BODY/SUS PIN/Gold/1.3

AD00674-7/2	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

■ VSWR ~67GHz ~1.2:1

☞ (43~50GHz ~1.3:1)

튀는대역이 발생함..

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

