


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2019.12.03.

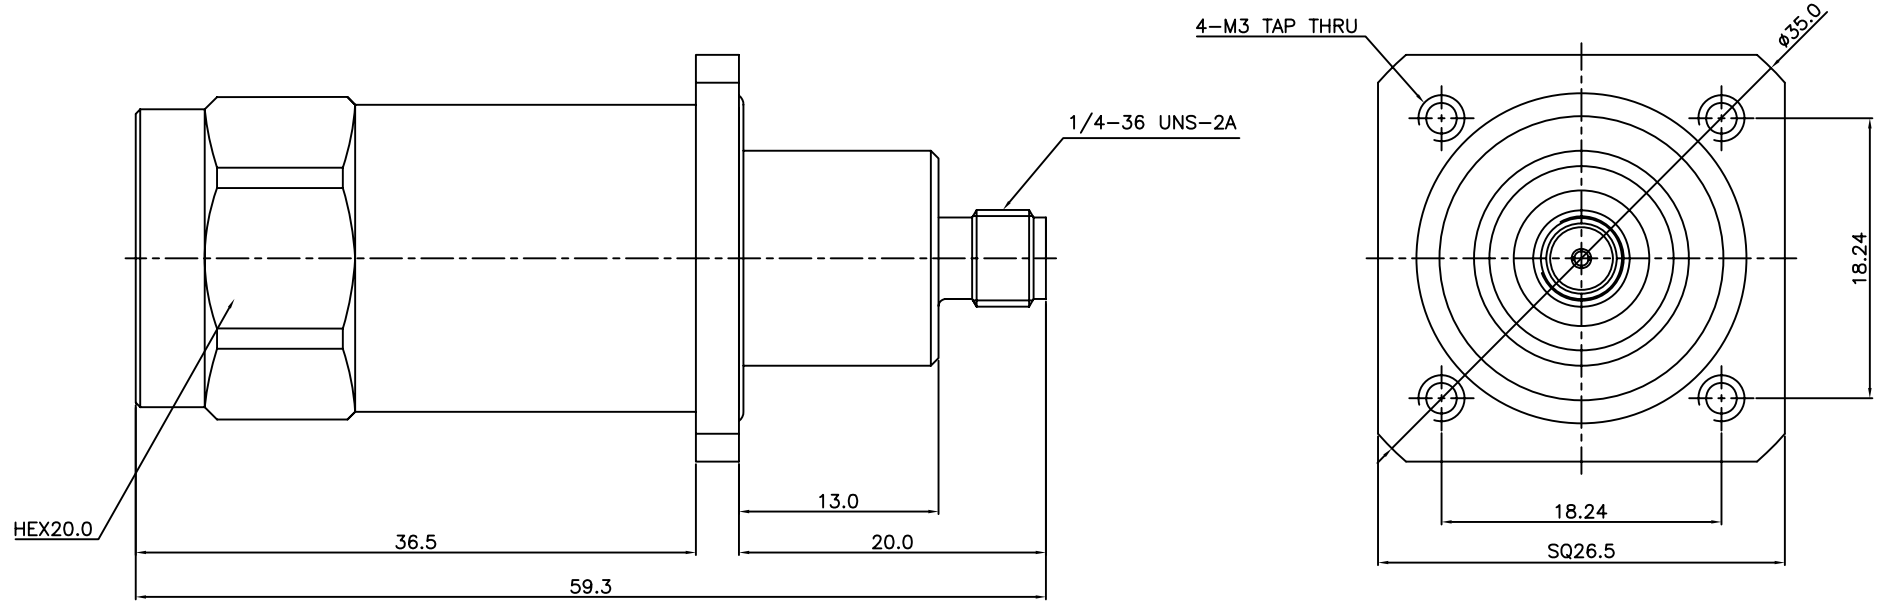

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 5.8GHz~5.9GHz
 Insertion Loss (Min.) : -0.3dB
 V.S.W.R (Max.) : 1.25
 Impedance : 50Ω
 방수 : IP67

*AS00149-7/1 ARRESTOR 외관에서 내부만 ADAPTOR 구조로 변경

9	INSULATOR	1	TEFLON		DIN02012-N/2
8	INSULATOR	1	TEFLON		DIN02011-N/1
7	GASKET	1	SILICONE RUB	RED	DGK00013-N/1
6	GASKET	1	SILICONE RUB	RED	DGK00050-N/1
5	GASKET	1	SILICONE RUB	RED	DGK00045-N/1
4	CONTACT (B)	1	BeCu C17300	Gold Plate	DCT04082-5/2
3	CONTACT (A)	1	MSsBD C3604BD-F	Gold Plate	DCT04081-5/2
2	BODY(B)	1	MSsBD C3604BD-F	Nickel Plate	DBD04571-5/1
1	BODY(A)	1	MSsBD C3604BD-F	Nickel Plate	DBD04570-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE	2019. 12. 03.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	I.C.KIM		
MATERIAL		CHECKED BY		TITLE	
FINISH		DRAWN BY	S.Y.EUN	N50 (P) SMA50 (J) 4 HOLE ADAPTOR	
		SCALE	3/1	DWG. NO. AD00683-7/1	
		UNIT	mm	REVISION I R SHEET 1 of 1	