


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.11.29.

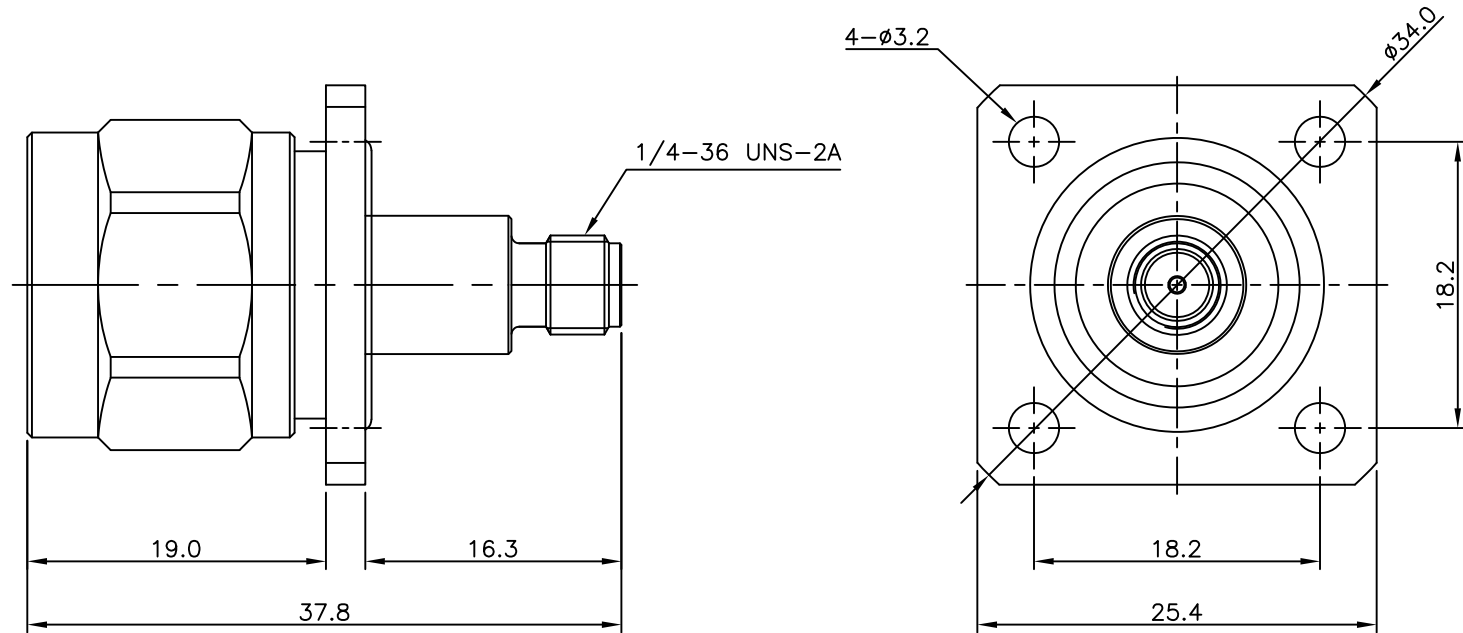

★ 전기적 특성

1	Frequency range	DC ~ 6GHz
2	Impedance	50ohm NOMINAL
3	V.S.W.R	1.2 : 1 (Max)
4	Insertion loss	-0.2dB (Min)

8	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
7	COUPLING CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00063-5/3
6	INSULATOR	1	TEFLON		DAI02494-N/1
5	GASKET	1	SILICONE RUB	RED	DGK00042-N/2
4	GASKET	1	SILICONE RUB	RED	DGK00013-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DAC03409-5/1
2	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04877-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04735-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2022. 11. 29.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.H.KIM		
MATERIAL _____		CHECKED BY	TITLE N50 (P) SMA50 (J) 4HOLE ADAPTOR		
		DRAWN BY			
FINISH _____	SCALE 2/1	UNIT mm		A4	DWG NO. AD00745-7/1
					REVISION