


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.08.21.

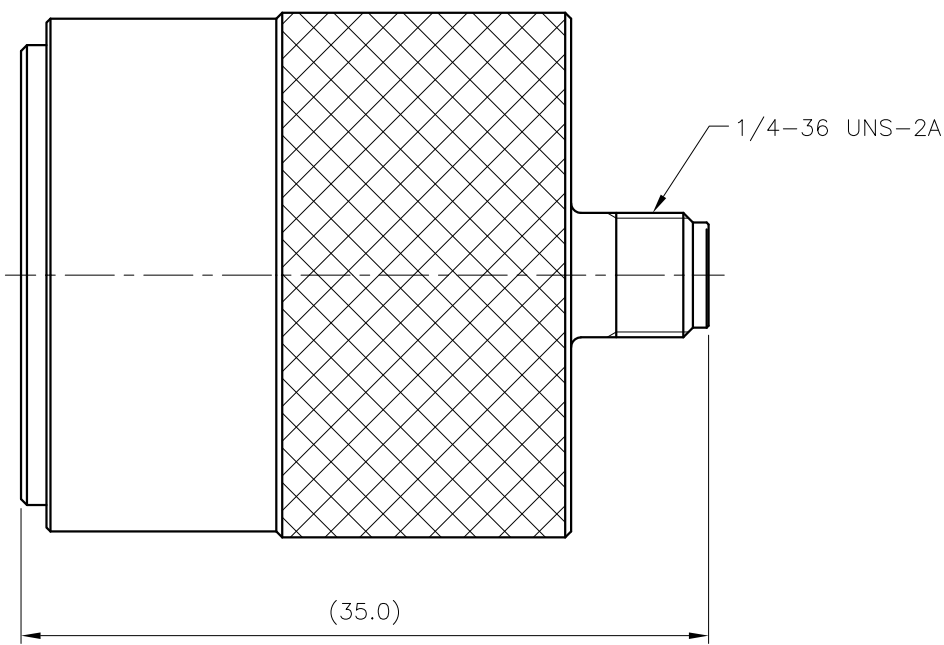

ELECTRICAL DATA

1	Frequency range	DC ~ 6.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.3dB min
5	PIMD (CDMA,WCDMA)	165dBc (Min) (20W*2Tone)

8	SPRING	2	SUS	Pasivate	DSR01206-5/1
7	BALL	3	SUS	—	DBA00005-N/1
6	RING	1	MBsBD C3604BD-F	Nickel Plate	DSR01207-5/1
5	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02333-5/1
4	INSULATOR	1	TEFLON		DAI02507-N/1
3	GASKET	1	SILICONE RUB		DGK00036-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (3μm)	DAC03415-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DAD00467-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 08. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
	Angle ±1°	APPROVED BY						
	CHECKED BY							
MATERIAL _____		DRAWN BY		S.H.KIM		TITLE 4.3/10 DIN50 (P) SMA50 (J) 4.3/10 DIN QUICK/LOCK ADAPTOR		
FINISH _____		SCALE 2.5/1		UNIT mm				
						A4	DWG NO. AD00750-7/1	
							REVISION I R	