




REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM		2012.01.30.
2	[설번처리No.202105-0004] 고객사 요청 GAS TUBE 변경	I.C.KIM		2021.05.11.

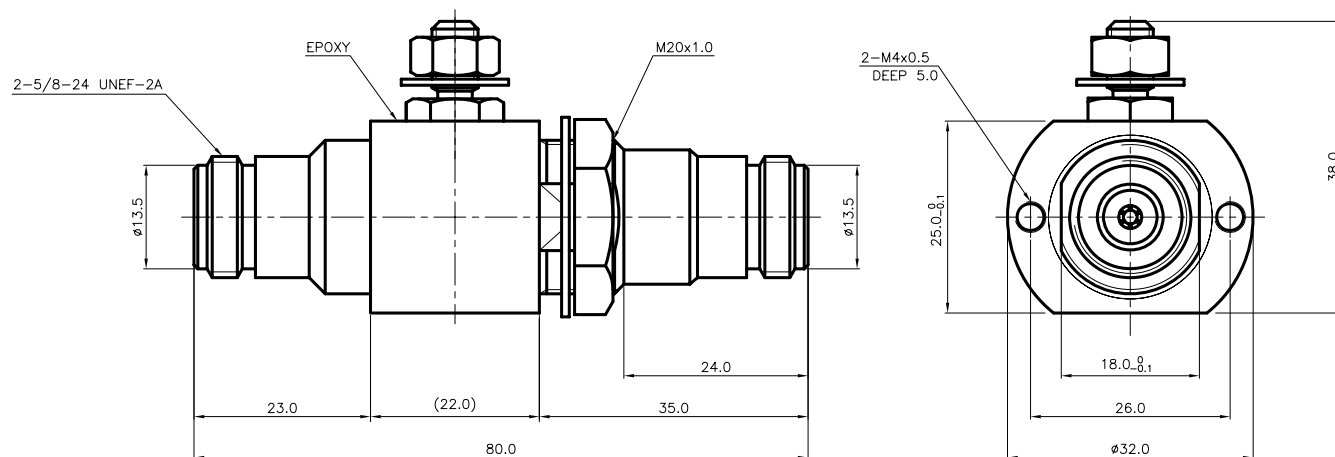

GASKET 별도 포장

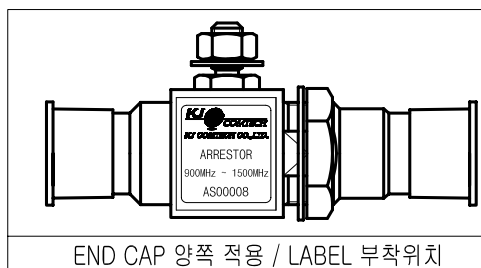

END CAP 양쪽 적용 / LABEL 부착위치

* ELECTRICAL SPECIFICATIONS
 Impedance : 50Ω (Nominal)
 Frequency Range : 900~1500MHz
 V.S.W.R (MAX) : 1.2 : 1
 Insertion Loss : 0.2dB (MAX)
 Type : Gas Capsule Type
 DC sparkover voltage (100V/s) : 1190-1610 V ±15%
 Impulse discharge current : 2 kA

16	LABEL	1	은무데드통		DLA00281-8/2
15	END CAP	2			DGK00114-N/1
14	GAS TUBE (BHS1400V/15)	1			DGT00020-N/1 DGT00001-N/1
13	SPRING WASHER	1	BeCu C17300	Silver Plate	DWA00086-5/1
12	WASHER	1	SUS	부동태 처리	DWA00085-5/1 (Q8030)
11	WASHER	1	MBsBD C3604BD-F	Nickel Plate	DWA00048-5/2
10	NUT	1	SUS	부동태 처리	DNT00004-5/1
9	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00011-5/2
8	BOLT	1	MBsBD C3604BD-F	Nickel Plate	DBT00994-5/3
7	INSULATOR	1	TEFLON		DIN00972-N/1
6	INSULATOR	1	TEFLON		DIN00971-N/1
5	GASKET	1	SILICONE RUB		DGK00145-N/1
4	CONTACT	2	BeCu C17300	Gold Plate	DCT01575-5/2
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT01026-5/1
2	BODY (B)	1	MBsBD C3604BD-F	Nickel Plate	DBD01376-5/2
1	BODY (A)	1	MBsBD C3604BD-F	Nickel Plate	DBD02643-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3 Angle ±1°	DATE	2021. 05. 11.
MATERIAL		APPROVED BY	
FINISH		CHECKED BY	
		DRAWN BY	I.C.KIM
SCALE	1.5/1	UNIT	mm

 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		TITLE	
		ARRESTOR NJ-NJ/BH	
DWG NO.		AS00008-7/5	
REVISION		SHEET	
1		1 of 1	