
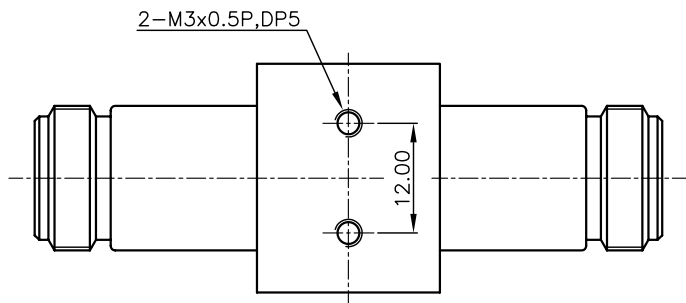
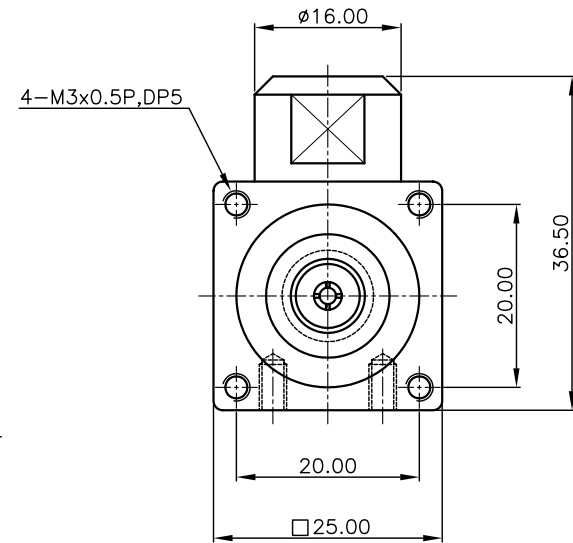


1 2 3 4 5 6

REVISION		
REV	DESCRIPTION	DATE
IR	최초 개정	2009.02.20.

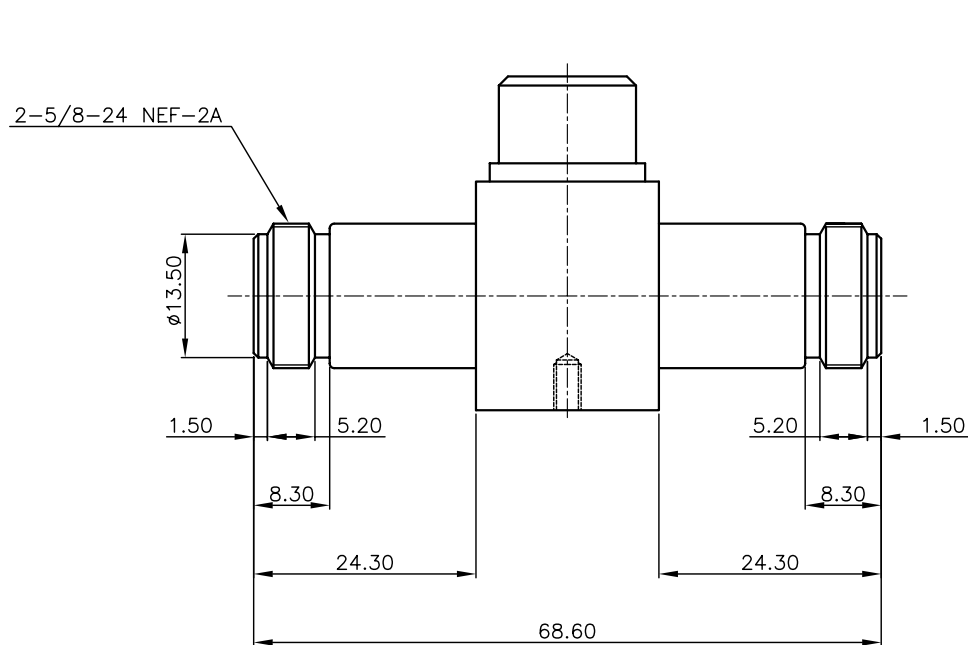

8	CAP	1	MBsBD	Nickel Plate	DCS00041-5/1
7	GASKET	1	SILICONE RUB	RED	DGK00032-N/1
6	INSULATOR	2	TEFLON		DIN00699-N/1
5	CONTACT(C)	1	MBsBD	Silver Plate	DCT01918-5/1
4	CONTACT(B)	1	BeCu	Silver Plate	DCT01917-5/1
3	CONTACT(A)	2	MBsBD	Silver Plate	DCT01916-5/1
2	BODY(B)	1	MBsBD	Nickel Plate	DBD02401-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02400-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

* ELECTRICAL SPECIFICATIONS
Frequency Range : 5GHz ~ 6GHz
Insertion Loss (Min.) : -0.2dB
Input V.S.W.R (Max.) : 1.15 : 1
Impedance : 50Ω NOMINAL

TOLERANCE	Decimal	DATE 2009. 02. 20.	
	Angle	APPROVED BY	S.J.YOUN
MATERIAL	±0.1	CHECKED BY	E.H.KIM
	±1°	DRAWN BY	I.C.KIM
FINISH		SCALE	UNIT
		1.2/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE			
NJ-NJ λ/4 ARRESTOR			
A4	DWG NO.	AS00077-7/1	
	REVISION	I R	SHEET 1 of 1