
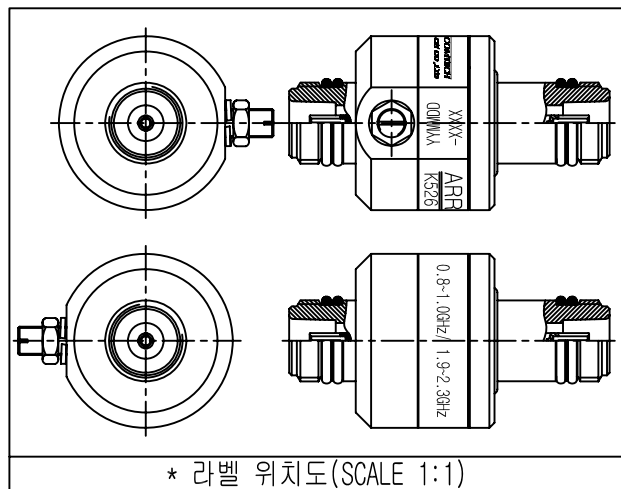


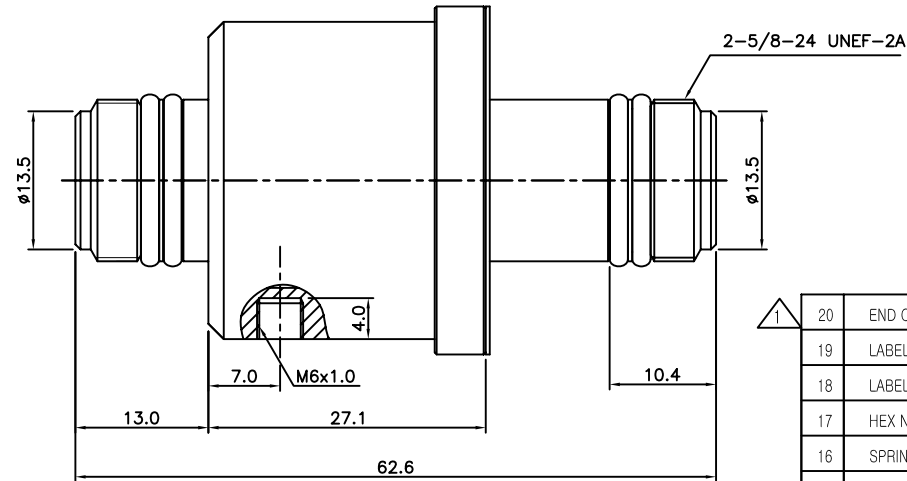


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	D.W.KANG	Y.H.CHOI	2010. 03. 19.
1	[설번No.201606-0008] END CAP 추가 등록 요청 건	H.J.LEE	I.C.KIM	2016. 06. 28.

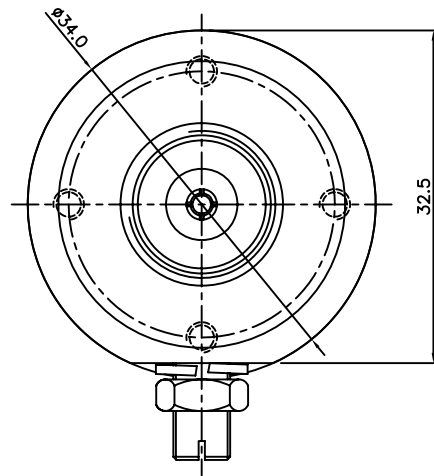

* ELECTRICAL SPECIFICATIONS

1. Frequency Range : 0.8~1.0GHz / 1.9~2.3GHz
2. Impedance : 50Ω (Nominal)
3. V.S.W.R (Max.) : 1.2 : 1
4. Insertion Loss (Max.) : 0.2dB
5. Surge Current : $\begin{cases} 20\text{kV} (1.2 \times 50\mu\text{s}) \\ 10\text{kA} (8 \times 20\mu\text{s}) \end{cases}$

20	END CAP	2	PVC(RED)		DGK00141-N/1
19	LABEL	1	은색라벨지		DLA00152-8/1
18	LABEL	1	반투명라벨지		DLA00138-8/2
17	HEX NUT	1	SUS		DNT00004-5/1 (N8012)
16	SPRING WASHER	1	SUS		DWA00081-N/1 (Q8027)
15	BOLT	1	MBsBD	Nickel Plate	DBT00655-5/2
14	PAD	2	절연테이프		DIT00001-N/1 (XA901)
13	CIRCLE PLATE	1	A6061	Silver Plate	DCA00003-5/1 (XA905)
12	JOINT PIN(C)	1	MBsBD	Silver Plate(5μm)	DCT01798-5/1
11	JOINT PIN(B)	1	MBsBD	Silver Plate(5μm)	DCT01800-5/1
10	JOINT PIN(A)	1	MBsBD	Silver Plate(5μm)	DCT01799-5/1
9	INSULATOR	1	TEFLON	White	DIN01057-N/1 (H8277)
8	INSULATOR	1	TEFLON	White	DIN00973-N/1 (H8230)
7	GASKET	1	Silicone Rub	Red	DGK00145-N/1 (G8050)
6	GASEKT	1	NBR 경도 80%	Black	DGK00211-N/1
5	GASKET	4	Silicone Rub	Red	DGK00029-N/1 (G6406)
4	CONTACT(B)	1	BeCu	Silver Plate(5μm)	DCT01872-5/1
3	CONTACT(A)	1	BeCu	Silver Plate(5μm)	DCT01873-5/1
2	BODY(B)	1	MBsBD	SUCO Plate(6μm)	DBD02722-5/1
1	BODY(A)	1	MBsBD	SUCO Plate(6μm)	DBD02244-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2016. 06. 28
	Angle	APPROVED BY	I.C.KIM
MATERIAL	±1°	CHECKED BY	
		DRAWN BY	H.J.LEE
FINISH	SCALE	UNIT	mm
	2/1		

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO., LTD.		TITLE N(F)-N(F) λ/4 ARRESTOR 0.8~1.0GHz/1.9~2.3GHz	
DWG NO. AS00094-7/1		REVISION 1 SHEET 1 of 1	