
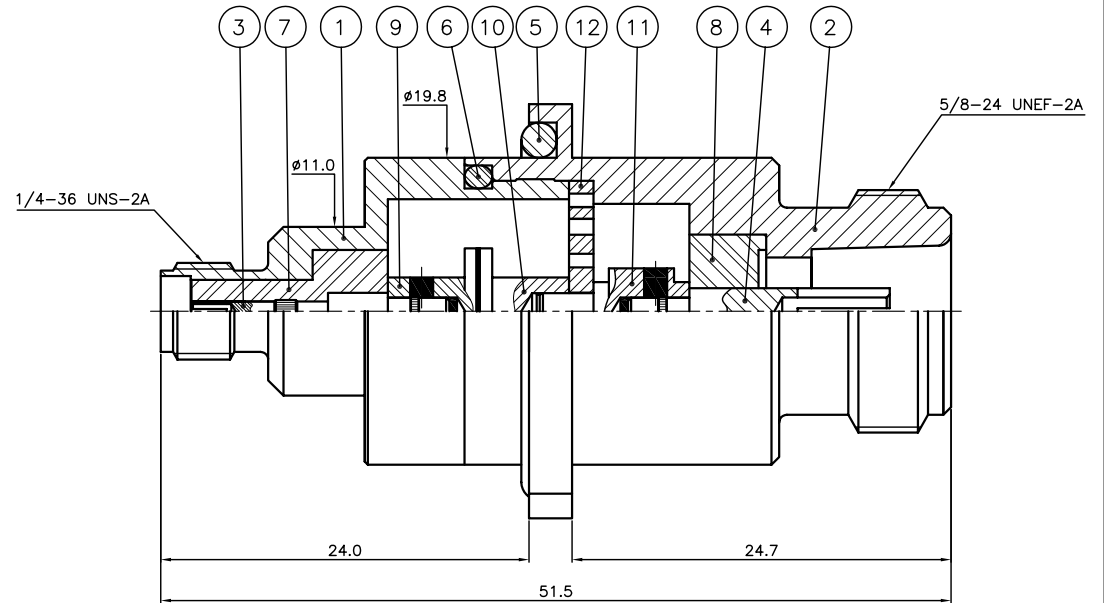


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	Y.H.CHOI	2011.04.08.

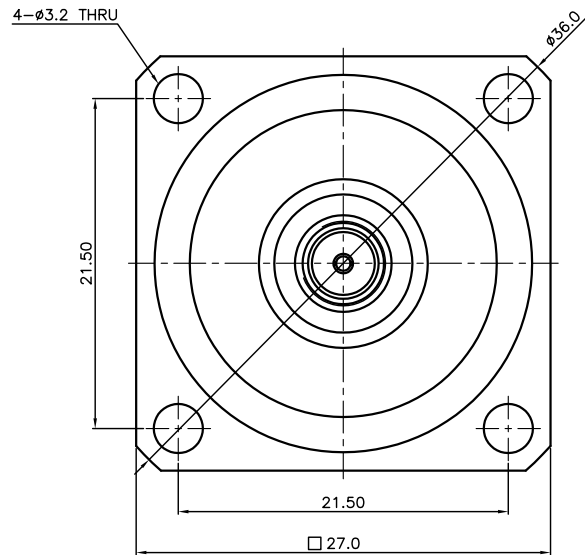


* 조립 주기

1. PAD를 JOINT PIN에 부착시 정확히 붙인다. <수량 참고하여 붙인다.>
2. BODY(A)와 BODY(B)를 억지끼움시 더 이상 들어가지 않는 부위까지 압입한다.
3. JOINT PIN 억지끼움은 그림 1 참조 할 것.



* ELECTRICAL SPECIFICATIONS

Frequency Range : 5100~5800 MHz
 Insertion Loss (Max.) : 0.2 dB
 V.S.W.R (Max.) : 1.20 : 1
 Power Handling (Max.) : 10W
 Impedance : 50Ω
 Surge Protection Capability : 6kV(1.2/50μs) / 3kA (8/20μs)



** 그림 1 **

JOINT PIN 조립 후 치수

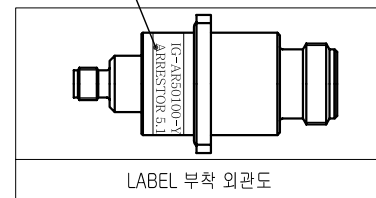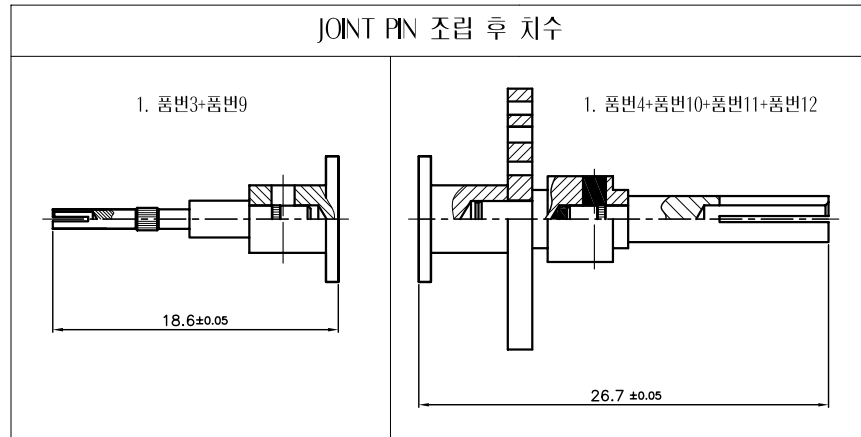

14	LABEL	1	은무대드름		DLA00396-8/1
13	PAD	2	절연테이프		DIT00006-N/1
12	CIRCLE PLATE	1	A5052	Silver Plate	DCA00015-5/1
11	JOINT PIN (C)	1	MBsBD	Gold Plate	DCT02434-5/1
10	JOINT PIN (B)	1	MBsBD	Gold Plate	DCT02224-5/2
9	JOINT PIN (A)	1	MBsBD	Gold Plate	DCT02368-5/1
8	INSULATOR	1	TEFLON		DIN01753-N/1
7	INSULATOR	1	TEFLON		DIN01738-N/1
6	GASKET	1	SILICONE RUB	RED	DGK00045-N/1
5	GASKET	1	SILICONE RUB	RED	DGK00053-N/1
4	CONTACT (B)	1	BeCu	Gold Plate	DCT02433-5/1
3	CONTACT (A)	1	BeCu	Gold Plate	DCT02222-5/1
2	BODY(B)	1	MBsBD	Nickel Plate	DBD02908-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02808-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.1	2011. 04. 08.		
	Angle	APPROVED BY	 KJ COMTECH CO.,LTD.	
	±1°	Y.H.CHOI		
MATERIAL		CHECKED BY	TITLE SMAJ NJ(1/4λ) ARRESTOR 5100~5800 MHz	
FINISH		DRAWN BY	A3	
		I.C.KIM		
		SCALE	DWG NO.	AS00103-7/1
		3/1	REVISION	I R
		mm	SHEET	1 of 1
				