
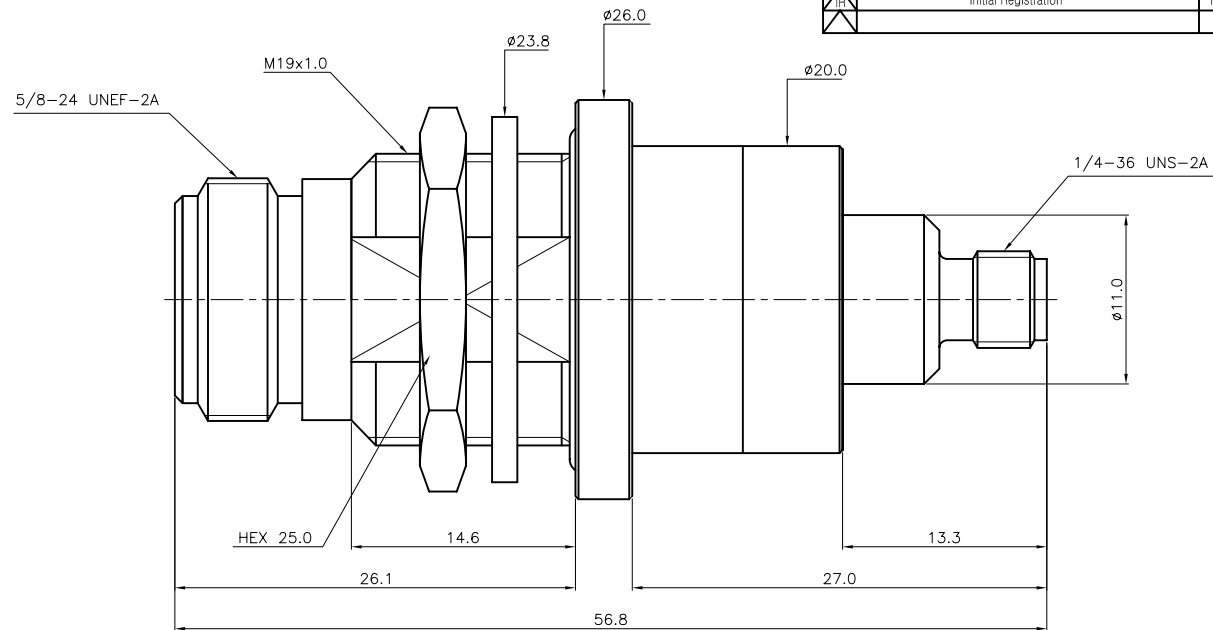


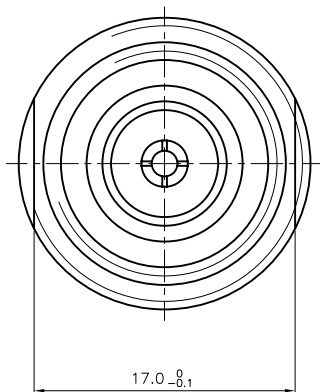


## Notes

1. RoHS & Pb-FREE
2. CONNECTOR MATERIAL & FINISHES
  - 2-1. ARRESTOR-▶▶BODY : MBsBD / Nickel Plating  
CONTACT : BeCu / Gold Plating  
WASHER , NUT : MBsBD / Nickel Plating

### \* ELECTRICAL SPECIFICATIONS

Frequency Range : 2000~3000 , 5000~6000MHz  
 Insertion Loss (Max.) : 0.5 dB  
 V.S.W.R (Max.) : 1.35 : 1  
 Power Handling (Max.) : 10W  
 Impedance : 50Ω  
 Surge Protection Capability  
 : 6kV(1.2/50μs) / 3kA (8/20μs)

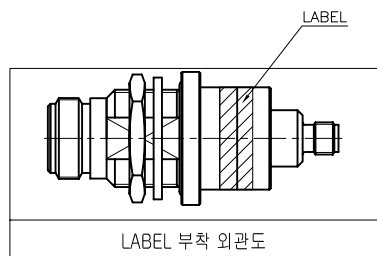

| REVISION |                      |         |          |             |
|----------|----------------------|---------|----------|-------------|
| REV      | DESCRIPTION          | DRAWN   | APPR     | DATE        |
| 1        | Initial Registration | I.C.KIM | Y.H.CHOI | 2011.04.08. |

| NO.       |         | DESCRIPTION        | Q'TY     | MATERIAL                                                                      | PLATING | CODE |
|-----------|---------|--------------------|----------|-------------------------------------------------------------------------------|---------|------|
| TOLERANCE | Decimal | DATE 2012. 03. 06. |          | <br>RF & MICROWAVE TECHNOLOGY<br>Tel : 82-32-347-8015<br>Fax : 82-32-347-8017 |         |      |
|           | Angle   | APPROVED BY        | J.H.YOUN |                                                                               |         |      |
| MATERIAL  |         | CHECKED BY         |          | TITLE                                                                         |         |      |
| FINISH    |         | DRAWN BY           | I.C.KIM  | NJ SMAJ(1/4λ) ARRESTOR                                                        |         |      |
| SCALE     |         | 3/1                | UNIT     | DWG NO. AS00106-7/1                                                           |         |      |
|           |         |                    | mm       | REVISION I R SHEET 1 of 1                                                     |         |      |