
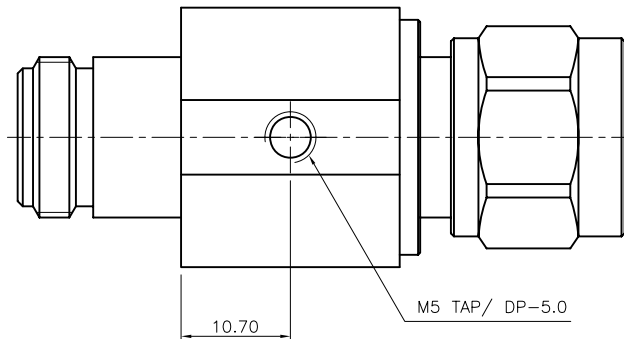
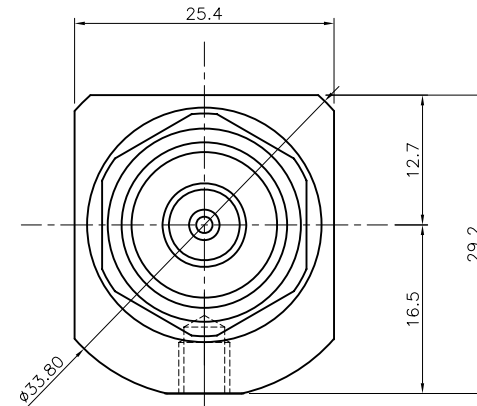
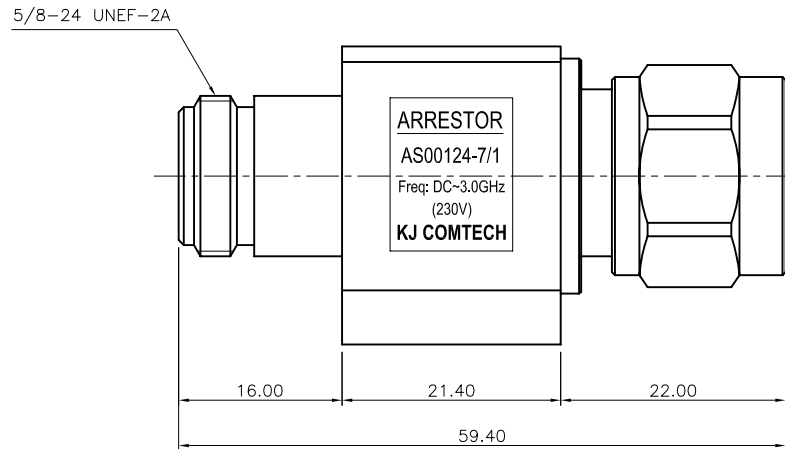
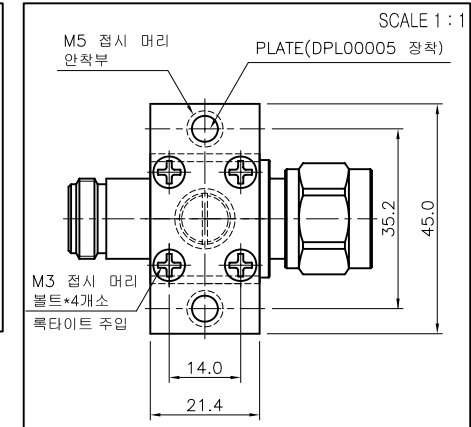



REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
1	Initial Registration	E.H.KIM	I.C.KIM	2014. 04. 22.	
1	[설번No. 201501-0004] 특성개선으로 인한 핀,커버 변경	H.J.LEE	I.C.KIM	2015. 01. 07.	

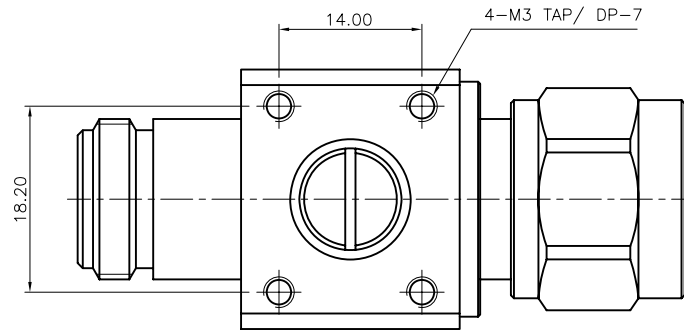

* ELECTRICAL SPECIFICATIONS
 Frequency Range : DC~3.000 MHz
 Insertion Loss(Max.) : 0.2dB
 V.S.W.R : 1.2:1
 Impedance : 50.0Ω
 DC Spark-over Voltage : 90V ±20%
 Impulse Discharge Current : 10kA (8/20us-10 times)
 Type : GAS TUBE
 Operating Temperature Range : -30.0℃ ~ +80.0℃

* MECHANICAL SPECIFICATIONS
 HOUSING : Brass (Nickel Plate)
 CONNECTORS PINS : Brass, Beryllium Copper(Gold Plate)
 INSULATORS : TEFLON
 PLTAE : A5052 (White Chromate)

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE	2015. 01. 07.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
APPROVED BY	I.C.KIM				
CHECKED BY			TITLE N(J)-N(P) ARRESTOR		
DRAWN BY	H.J.LEE				
SCALE	2/1	UNIT	DWG NO. AS00124-7/1 REVISION 1 SHEET 1 of 1		
FINISH		mm			