

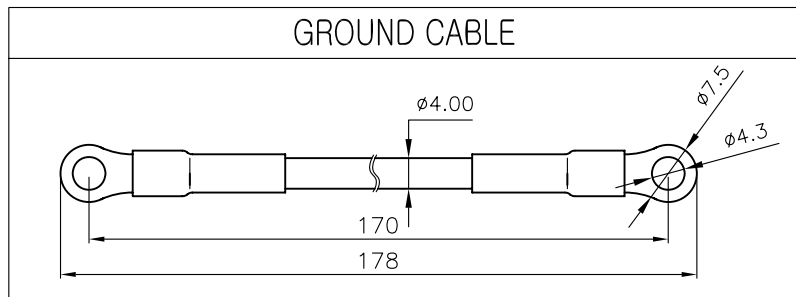
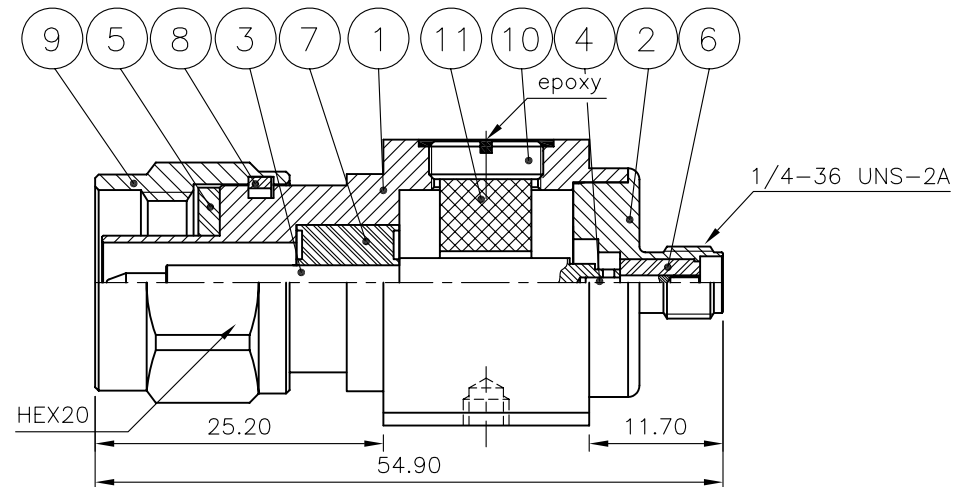


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.M.LEE	I.C.KIM	2014.12.23.

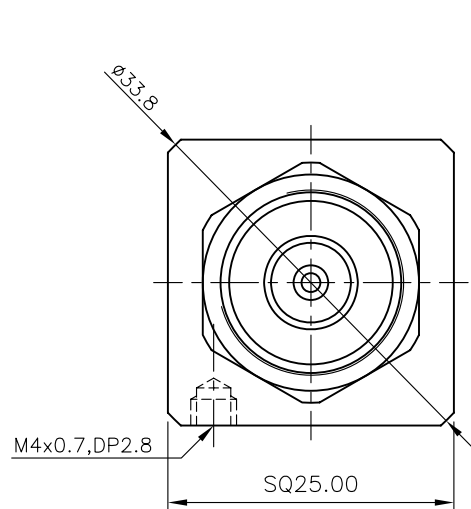

ELECTRICAL SPEC

1. Impedance : 50ohm (Nominal)
2. Frequency range : DC 2.5GHz
3. VSWR (max) : 1.2
4. SURGE Current : 1.2x50μs 6kV/3kA

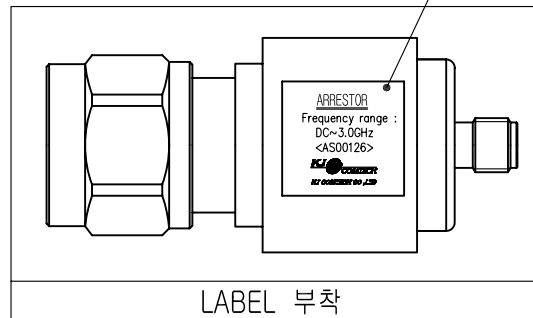

13	GND CABLE	1			CA07161-N/1
12	LABEL	1	은무데드롱		DLA00608-8/1
11	GASTUBE	1		2P-23	DGT00001-N/1
10	COVER	1	MBsBD	Nickel Plate	DCS00010-5/1
9	CAP	1	MBsBD	Nickel Plate	DCU00063-5/3
8	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1
7	INSULATOR	1	TEFLON		DIN02510-N/1
6	INSULATOR	1	TEFLON		DIN01417-N/1
5	GASKET	1	SILICONE RUB		DGK00013-N/1
4	CONTACT	1	BeCu	Gold Plate	DCT01759-5/2
3	CONTACT	1	MBsBD	Gold Plate	DCT03333-5/1
2	BODY	1	MBsBD	Nickel Plate	DBD02439-5/1
1	BODY	1	MBsBD	Nickel Plate	DBD03822-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2014. 12. 23.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL	_____	CHECKED BY	
	_____	DRAWN BY	S.M.LEE
FINISH	_____	SCALE	UNIT
	_____	1.5/1	mm

		RF & MICROWAVE TECHNOLOGY	
		Tel : 82-32-347-8015 Fax : 82-32-347-8017	
TITLE		N50 (P) SMA50 (J) ARRESTER(Gas Type)	
DWG NO.		AS00126-7/1	
REVISION		I R	SHEET 1 of 1

A4