


DC~3GHz 5Watts

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
I	Initial Registration	E.H.KIM	I.C.KIM	2013. 03. 13.

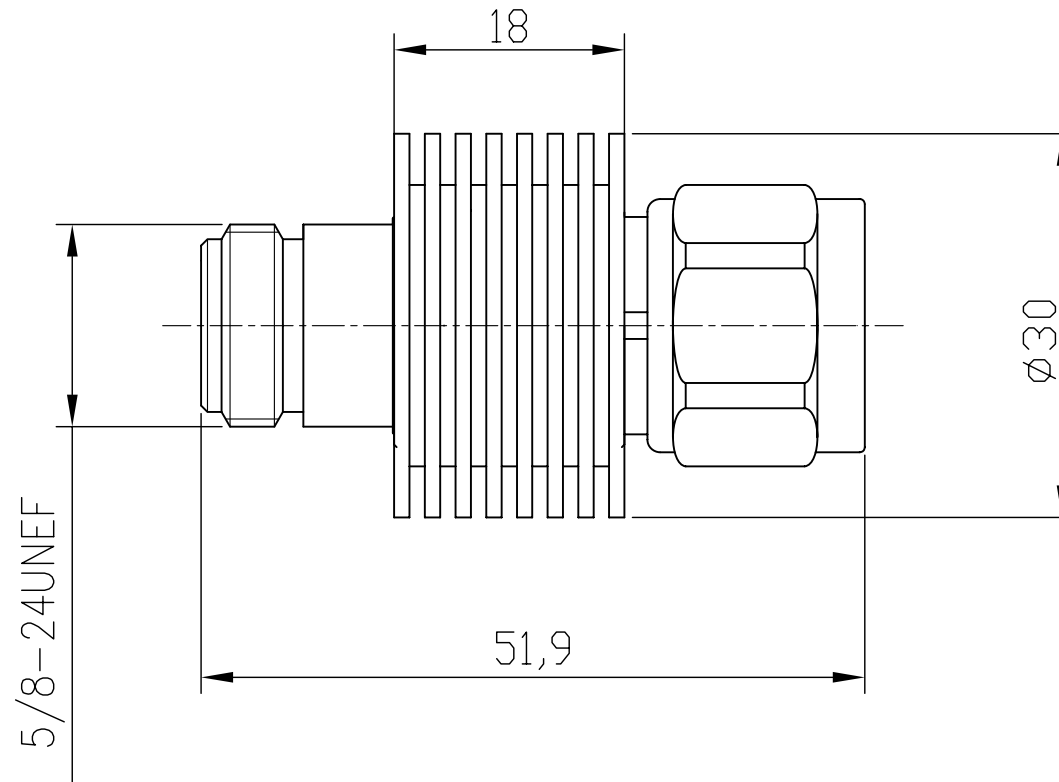

MECHANICAL SPECIFICATIONS	
Connectors	Brass Nickel Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium Copper Gold Plated
Housing	Aluminum Liquid DIC-582(Black)
Temp Range	- 55°C ~ + 125°C
Dimensions	Ø30x51.9mm

ELECTRICAL SPECIFICATIONS					
Frequency Range : DC ~ 3GHz			Impedance : 50 Ω	Power : 5 Watts	
KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (max)	KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (max)
AT00082-N/3	3 ± 0.9	1.2 : 1			
AT00082-N/5	5 ± 0.9	1.2 : 1			
AT00082-N/10	10 ± 0.6	1.2 : 1			
AT00082-N/15	15 ± 0.8	1.2 : 1			
AT00082-N/20	20 ± 0.8	1.2 : 1			
AT00082-N/30	30 ± 1.0	1.2 : 1			

TOLERANCE	Decimal ±0.3	DATE	2013. 03. 13.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL	A6061 T6	CHECKED BY		TITLE DC~3GHz 5Watts N50 (J)-N50 (P) ATTENUATORS
		DRAWN BY	E.H.KIM	
FINISH DIC-582 Texture(BLACK)	SCALE 1/1	UNIT mm		DWG NO. AT00082
				REVISION I R SHEET 1 of 1