


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2014.12.29
2	기구 변경	S.L.SON	J.H.YOUN	2015.04.28
3	Connector 길이 변경, 라벨 부착부 변경, 주파수 변경	T.J.KIM	J.H.YOUN	2015.07.09
4	4.1/9.5 Mini Din -> 4.3/10 Mini Din으로 변경	T.J.KIM	J.H.YOUN	2016.03.25

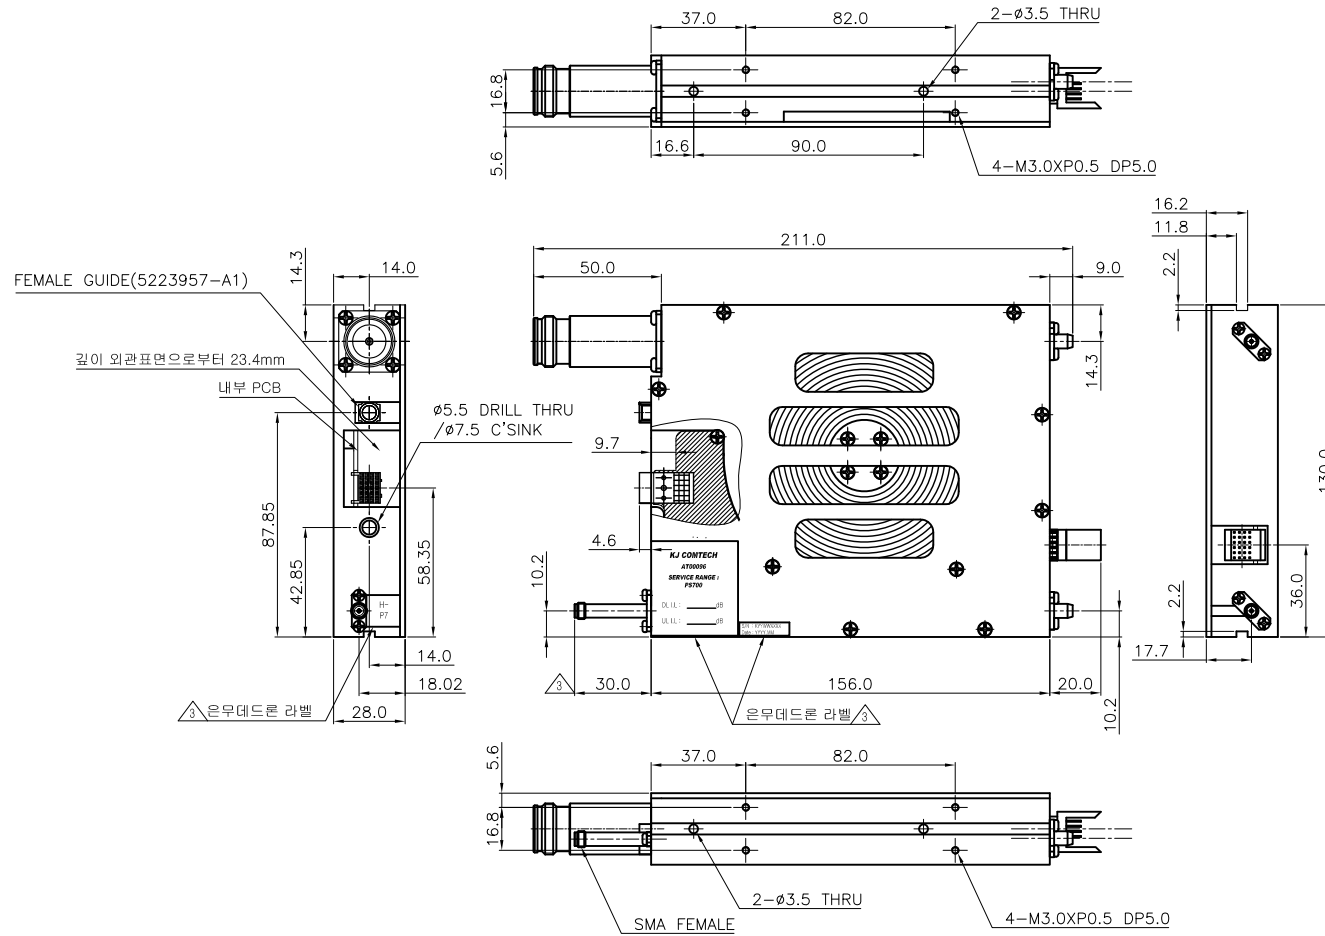

* ELECTRICAL SPECIFICATIONS

Service Band : PS700

△ Frequency range : DL - 758 ~ 775MHz
UL - 788 ~ 805MHz

Input V.S.W.R (Max.) : 1.4 : 1

PIM (Max.) : -156dBc (@43.0dBm 2Tone, CDMA)

Attenuation Value : -23.0 ± 1.0dB(DL, UL)

Flatness (Max.) : 2.0dB(DL)

Input Power (Max.) : 40W

Impedance : 50Ω


* MECHANICAL SPECIFICATIONS

HOUSING : A6061 T6 (White Chromate)

CONNECTOR(4.3/10) : MBsBD (SUICO Plate)

CONNECTOR PIN(4.3/10) : Beryllium Copper (Silver Plate)

INSULATORS : TEFLON



S/N : KYYWXXXX
Date : YYYY.MM

* 삽입손실 표기 내용

A : 766.5 MHz Insertion Loss

B : 796.5 MHz Insertion Loss

해당 주파수의 값을 수기로 표기 (ex : -23.3)

* Serial label 표기 내용

S/N : KYYWXXXX (YY : YEAR, WW: WEEK, XXXX : NUMBER)

Date : YYYY.MM (Date of manufacture)

TOLERANCE	Decimal ±0.3 Angle ±1°	DATE 2016. 03. 25.	APPROVED BY J.H.YOUN	 RF & MICROWAVE TECHNOLOGY KJ COMTECH CO., LTD. Tel : 82-32-347-8015 Fax : 82-32-347-8917
MATERIAL	A6061 T6	CHECKED BY S.L.SON	TITLE PIMD ATTENUATOR	
FINISH	White Chromate	DRAWN BY T.J.KIM	DWG NO. AT00096-7/4	
SCALE	1/1	UNIT mm	REVISION 4	
			SHEET 1 of 1	