


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017.11.08.

1.SPECIFICATIONS

1	FREQ.	DC~4 GHz	
2	VSWR	1.25 MAX.	
3	POWER	1Watt	
4	ATTENUATION	3dB: ± 0.5 dB	AT00132-N/1
		6dB: ± 0.6 dB	AT00132-N/2
		10dB: ± 1.0 dB	AT00132-N/3
		20dB: ± 1.0 dB	AT00132-N/4
5	IMPEDANCE	50 Ω nominal	

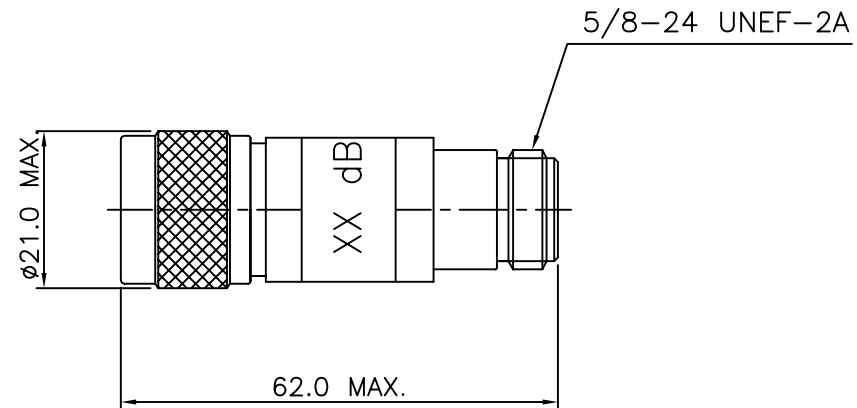

2. MECHANICAL SPECIFICATIONS

NO	PART NAME	SPECIFICATION	Q'TY	REMARKS
1	HOUSING	Brass(C3604 BD) , Ni PLATING	1	
2	INSULATOR	TEFLON(PTFE)	1	
3	GASKET	SILICONE RUBBER	1	
4	INNER CONTACT(M)	Brass(C3604 BD), Au PLATING	1	
5	INNER CONTACT(F)	BeCu(C1730 B) , Au PLATING	1	

TOLERANCE	Decimal ± 0.1	DATE 2017. 11. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE ATTENUATOR N TYPE PLUG to JACK
		DRAWN BY	S.Y.EUN	
FINISH		SCALE 1/1	UNIT mm	 A4
		DWG NO.	AT00132	
		REVISION	IR	SHEET 1 bbf 1