


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.01.18.


MECHANICAL SPECIFICATIONS	
Connectors	Brass Gold Plated
Male Pin	Brass Gold Plated
Female Pin	Beryllium copper Gold Plated
Housing	Brass Gold Plated
Temp Range	-55°C ~ + 125°C

ELECTRICAL SPECIFICATIONS					
Frequency Range : DC ~ 8GHz			Impedance : 50 ohm	Power : 2 Watts	
KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (MAX)	KJ CODE	Attenuation Value & Accuracy (dB)	V.S.W.R (MAX)
AT00160-N/1	1 ± 0.5	1.25 : 1	AT00160-N/A	10 ± 0.5	1.25 : 1
AT00160-N/2	2 ± 0.5	1.25 : 1	AT00160-N/B	15 ± 0.5	1.25 : 1
AT00160-N/3	3 ± 0.5	1.25 : 1	AT00160-N/C	20 ± 0.5	1.25 : 1
AT00160-N/4	4 ± 0.5	1.25 : 1	AT00160-N/D	30 ± 1.5	1.25 : 1
AT00160-N/5	5 ± 0.5	1.25 : 1	AT00160-N/E	40 ± 2.0	1.25 : 1
AT00160-N/6	6 ± 0.5	1.25 : 1			
AT00160-N/7	7 ± 0.5	1.25 : 1			
AT00160-N/8	8 ± 0.5	1.25 : 1			
AT00160-N/9	9 ± 0.5	1.25 : 1			

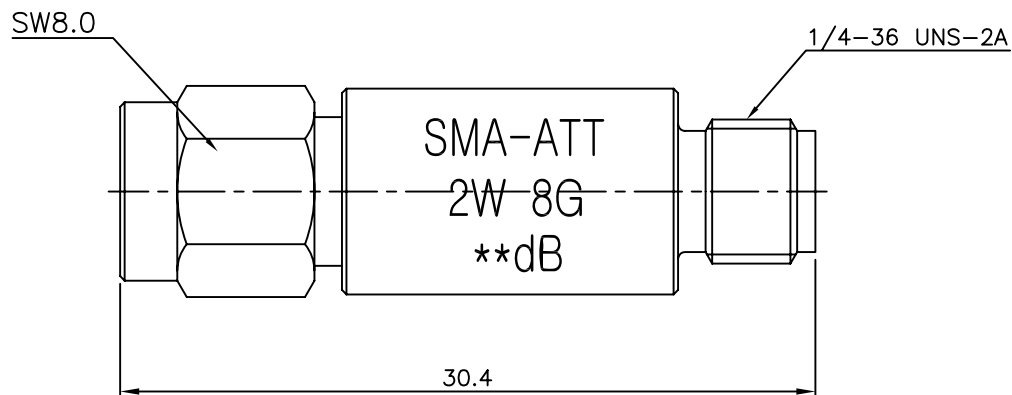

■ 에어웨이브 개선품

제품 레이저 각인 내용

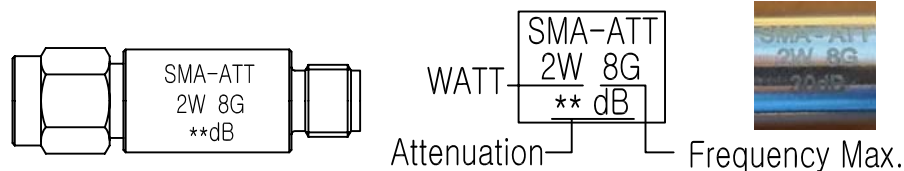

TOLERANCE	Decimal ±0.3	DATE 2022. 01. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	S.H.KIM	
MATERIAL		CHECKED BY		TITLE DC~8GHz 2Watt SMA50-JP-ATTENUATOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	DWG NO. AT00160 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4