


REVISION				
No.	DESCRIPTION	REV	DRAWN	APPR
1	Initial Registration	IR	H.J.LEE	I.C.KIM
				DATE
				2014. 12. 30.

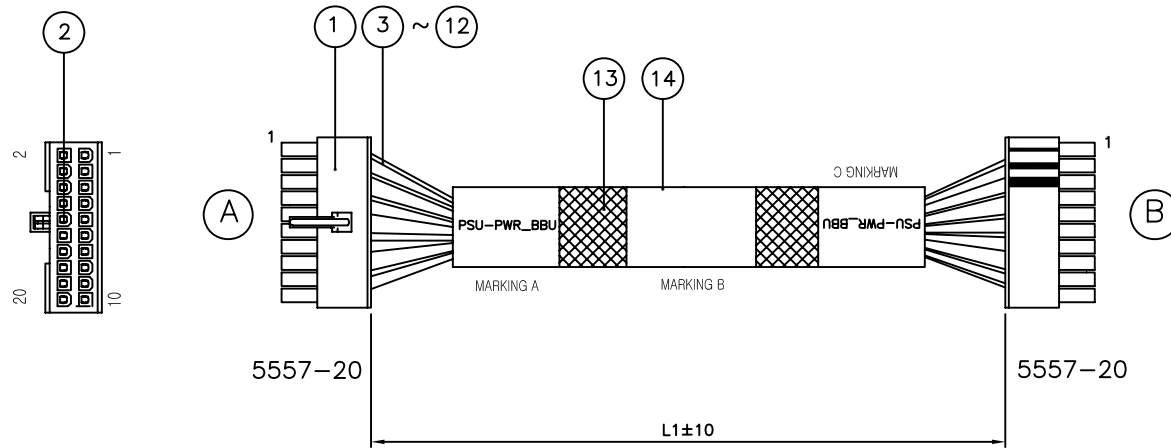

BLACK	1	1	BLACK
BROWN	2	2	BROWN
RED	3	3	RED
ORANGE	4	4	ORANGE
YELLOW	5	5	YELLOW
GREEN	6	6	GREEN
BLUE	7	7	BLUE
VIOLET	8	8	VIOLET
GRAY	9	9	GRAY
WHITE	10	10	WHITE

BLACK	11	11	BLACK
BROWN	12	12	BROWN
RED	13	13	RED
ORANGE	14	14	ORANGE
YELLOW	15	15	YELLOW
GREEN	16	16	GREEN
BLUE	17	17	BLUE
VIOLET	18	18	VIOLET
GRAY	19	19	GRAY
WHITE	20	20	WHITE

PSU-PWR_BBU		PSU-PWR_BBU
MARKING A	MARKING B	MARKING C
(MARKING 방향 주의)		

14	MARKING TUBE	3	LS TUBE	ATU00234-N/1	φ15-WHITE
13	EXPAND	1	1/4"	ATU00359-N/1	330mm(BLACK)
12	CABLE	1	0.75SQ	ACA00324-N/1	330mm(WHITE)
11	CABLE	1	0.75SQ	ACA00377-N/1	330mm(GRAY)
10	CABLE	1	0.75SQ	ACA00378-N/1	330mm(VIOLET)
9	CABLE	1	0.75SQ	ACA00358-N/1	330mm(BLUE)
8	CABLE	1	0.75SQ	ACA00325-N/1	330mm(GREEN)
7	CABLE	1	0.75SQ	ACA00321-N/1	330mm(BLACK)
6	CABLE	1	0.75SQ	ACA00359-N/1	330mm(YELLOW)
5	CABLE	1	0.75SQ	ACA00323-N/1	330mm(ORANGE)
4	CABLE	1	0.75SQ	ACA00322-N/1	330mm(BROWN)
3	CABLE	1	0.75SQ	ACA00320-N/1	330mm(RED)
2	TERMINAL PIN	40	MOLEX	DCN00195-N/1	5557-20
1	HOUSING	2	MOLEX	DCN00175-N/1	5557-20

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	REMARKS
DATE	2014. 12. 30.					
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY	H.J.LEE				
	DRAWN BY	H.J.LEE				
	CHECKED BY					
SCALE	N/S	UNIT	mm			
				A3	DWG NO.	CD00109-7/1
				REVISION	I R	SHEET 1 of 1