


MARKING - X

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2021. 07. 19.

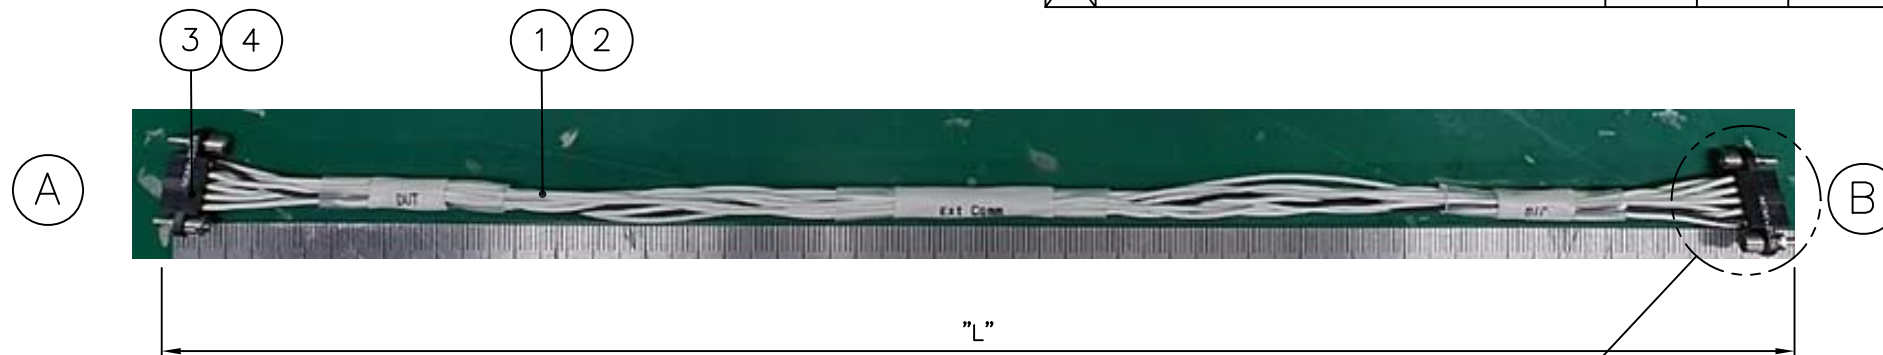


222C10M12

222C10M12

Diagram illustrating the 10x2 board layout for 222C10M12. The board is divided into two 10x1 sections. The left section has columns labeled BLACK and 1-10. The right section has columns labeled 1-10 and BLACK. Arrows indicate connections between corresponding rows of the two sections.

222C10M12		222C10M12	
BLACK	1	1	BLACK
WHITE	2	2	WHITE
WHITE	3	3	WHITE
WHITE	4	4	WHITE
WHITE	5	5	WHITE
WHITE	6	6	WHITE
WHITE	7	7	WHITE
WHITE	8	8	WHITE
WHITE	9	9	WHITE
WHITE	10	10	WHITE

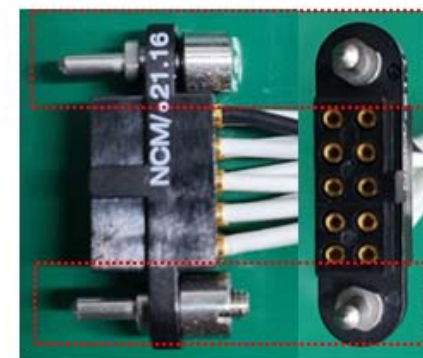

고정 Pin 분실 주의

4	TERMINAL PIN	20	——	C13064-P	C Type
3	HOUSING	2	——	222C10M12	
2	WIRE	9	——	AWG22	WHITE
1	WIRE	1	——	AWG22	BLACK
NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS

CUSTOMER	NO.	DESCRIPTION	Q'TY	SPEC	PART NO.	RAMARKS	
	DATE 2021. 07. 19.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8011 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE SIGNAL CABLE			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CD00391-7/1	
	SCALE	UNIT			DETAIL NO.		
	2/1	mm			REVISION	I R	SHEET