


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010. 02. 25.

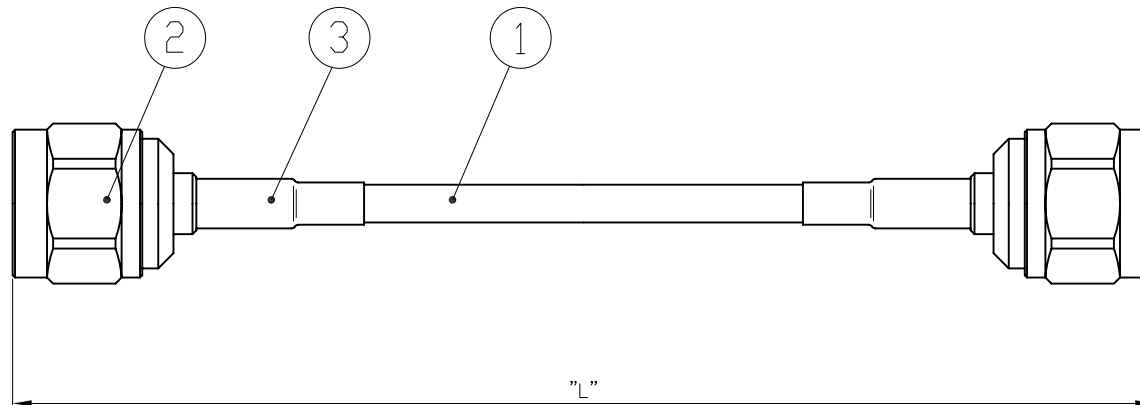

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N50 PS -----> BODY : Nickel Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

ELECTRICAL SPEC

Length: 1 meter
 Freq range: 0~2200MHz
 Insertion Loss: < 1db
 Return Loss < 26db
 Passive Intermodulation Products <-110dbm@2x20w
 Impedance: 50 ohms
 Power handling > 500w
 Operating Temp <-10c to > +50c
 Weatherproof: IP65

	3	SHRINK TUBE	2	SUMI TOMO	ATU00060-N/1	ø6x20 Black		
	2	CONNECTOR	2	KJ COMTECH	CN00882-7/1	N50-PS		
	1	COAXIAL CABLE	1	FLONTEC	ACA00099-N/1	RG223(50Ω) (GRAY)		
CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS		
	DATE 2010. 02. 25.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.				
CUSTOMER CODE	APPROVED BY	Y.H.CHOI						
	CHECKED BY	I.C.KIM						
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°	DRAWN BY		D.W.KANG		TITLE CABLE ASS'Y			
	CHECKED BY							
	SCALE		UNIT		A4	DWG NO.	CF00253-7/1	
	1/1					DETAIL NO.		
				REVISION	I	R	SHEET	1 of 1