
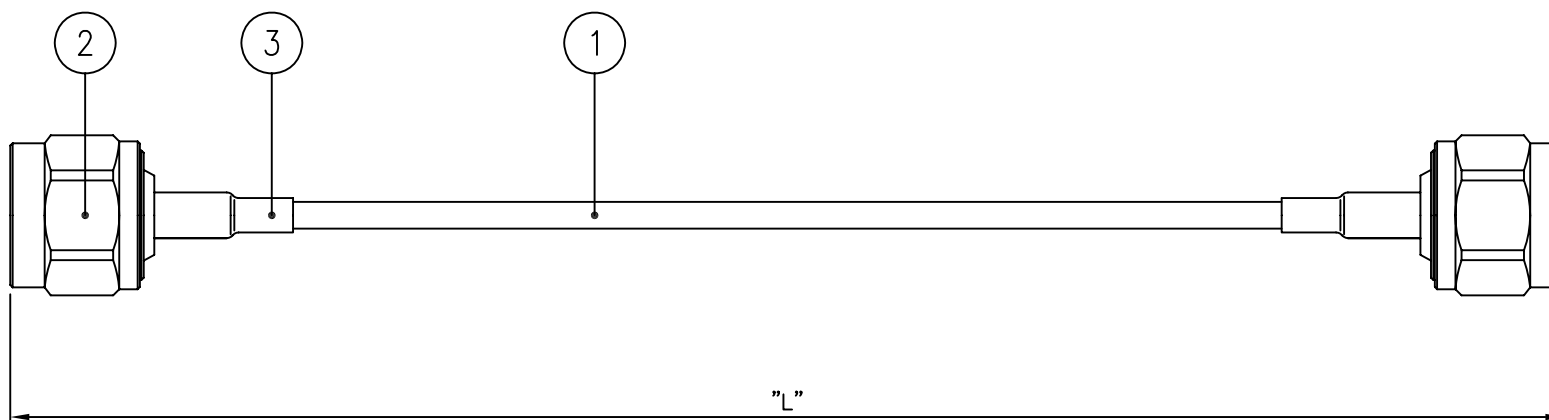


PIPE 반만 압착할 것

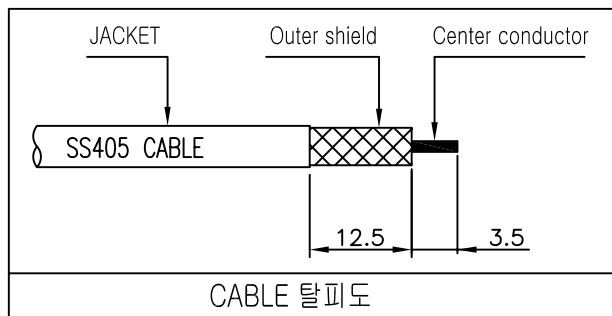

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N PS-----▶ BODY : SUCO Plating
 - CONTACT : Silver Plating
 - CAP : SUCO Plating

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2
4. PIMD SPEC : 150dBc 이상 (20W*2Tone)
[CDMA /WCDMA 장비 3차 기준]

REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021. 01. 11.

3	BONDING TUBE	2	LS TUBE	ATU00006-N/1	Ø6-30mm
2	CONNECTOR	2	KJ COMTECH	CN02758-7/9	N50 PS
1	COAXIAL CABLE	1	EXPANTEL	ACA00044-N/1	141MF(50Ω) BLUE

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2021. 01. 11.		KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY			TITLE CABLE ASSY		
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	I.C.KIM				
0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	SCALE	UNIT	A4			
	N/S	mm				



TITLE					
CABLE ASSY					
A4	DWG NO.	CF00261-7/3			
	DETAIL NO.				
	REVISION	I R	SHEET	1 of 1	