


CF00431-7/3

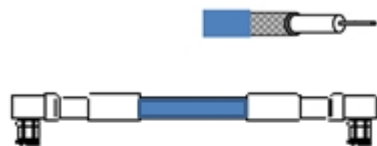

MCX-PL+MCX-PL

+85FJ(BLUE)

MCX PL 85TP V:7.7mm

BO/GO, PI/GO

JACK/BE.CU-3.4mm

CF00431-7/3 120mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

120mm - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	-	1.07	1.07	0.12
■_2.0GHz	-	1.02	1.01	0.17
■_3.0GHz	-	1.05	1.05	0.23
■_4.0GHz	-	1.02	1.01	0.25
■_5.0GHz	-	1.09	1.08	0.28
■_6.0GHz	-	1.08	1.08	0.32
■_7.0GHz	-	1.11	1.11	0.39
■_8.0GHz	-	1.19	1.16	0.39

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ MCX (J) SMA (J) 2H

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

AD00156-7/3

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

