


• Prepared by :

Report Date: 2023

CF00536-7/1



SMA-PL+SMA-PL +RG316(BROWN)

SMA PL RG316 BO/GO, PI/GO, CH/BR/NI

CF00536-7/1 150mm	
S11	
S22	
S21	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

■_0,5GHz/ 1,00, 1,00, 0,08
■_1,0GHz/ 1,02, 1,02, 0,15
■_1,5GHz/ 1,08, 1,09, 0,21
■_2,0GHz/ 1,10, 1,10, 0,26
■_3,0GHz/ 1,19, 1,19, 0,35

■_4,0GHz/ 1,10, 1,09, 0,39

■_5,0GHz/ 1,25, 1,26, 0,48 ■_6,0GHz/ 1,38, 1,37, 0,57

Test Adaptor

► NETWORK ANALYZER


- ☐ E5071B (~8.5GHz)
- ZND (~8.5GHz)
- □ ZVA50 (~50GHz)

► Test cable

- N Male to SMA Male 10GHz Cable (CF00540-7/1)
- □ N Male to N Male10GHz Cable (CF00539-7/1)
- ☐ 2.4mm Male to 2.4mm Male 50GHz Cable

6/1/2023 6:57:01 PM 1328.5170K92-102136-Va

TR1:IN PORT VSWR(S11), TR2:OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

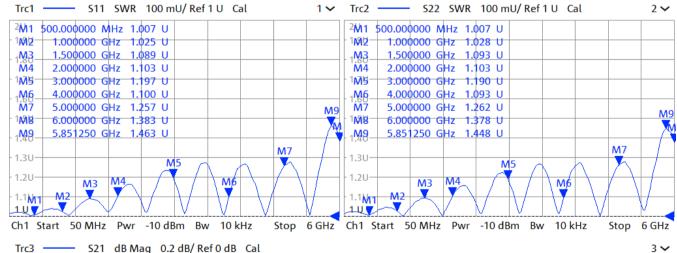



Ch1 Start 50 MHz

Pwr -10 dBm Bw 10 kHz UOSM P1,P2

Stop 6 GHz