



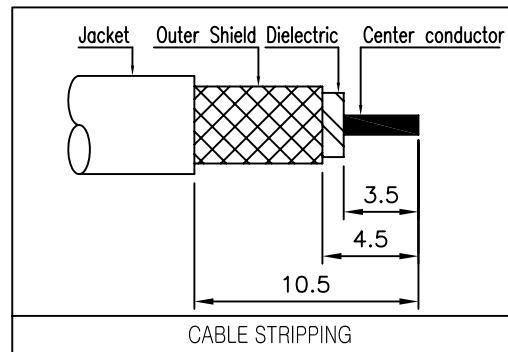

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2010.09.07.

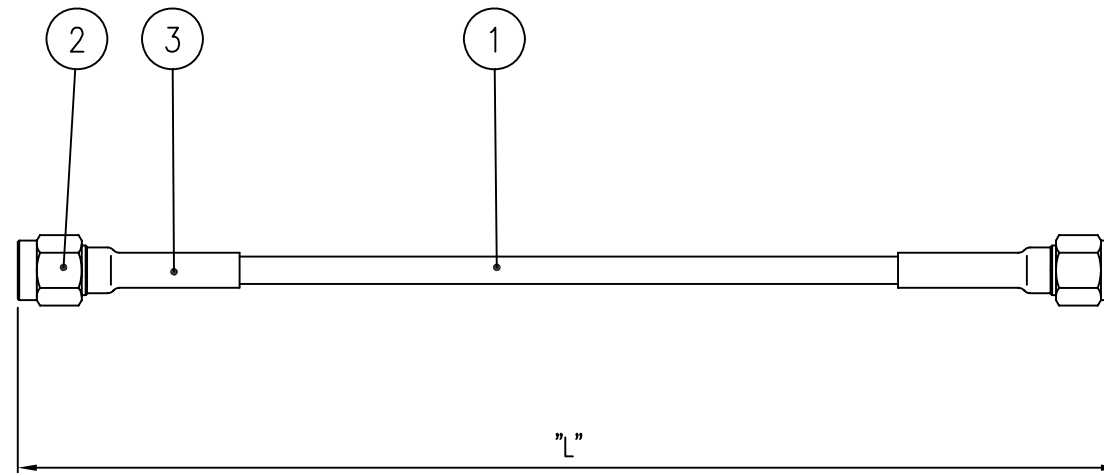

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA(M)---▶ BODY : Gold Plating
 - CONTACT : Gold Plating
 - CAP : Nickel Plating

3	BONDING TUBE	2	LS TUBE	ATU00006-N/1	ø6-20mm
2	CONNECTOR	2	KJ COMTECH	CN02764-7/A	SMA(M)ST
1	COAXIAL CABLE		EXPANTEL	ACA00040-N/2	141FJ (BLUE) Jacket Teflon

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2010. 09. 07.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY					
	DRAWN BY	I.C.KIM				
	CHECKED BY					
	SCALE	UNIT				
N/S	mm					
				A4	DWG NO.	CF00537-7/1
					DETAIL NO.	
				REVISION	I R	SHEET 1 of 1