

CF00859-7/2



TNC-PS+TNC-PS

+LMR400-UF(TIMES)

TNC PS LMR400 BO/binaryalloy(SUCO) Pi/GoCH/BR/binary alloy(SUCO)**CF00859-7/2 10M**

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

**10M
S11/S22/S21
(SWR, SWR, dB)**

■_1.0GHz	- 1.03, 1.04, 1.62
■_2.0GHz	- 1.07, 1.06, 2.43
■_3.0GHz	- 1.06, 1.05, 3.08

■_4.0GHz	- 1.06, 1.26, 3.77
■_5.0GHz	- 1.29, 1.25, 4.26
■_6.0GHz	- 1.29, 1.20, 4.74
■_7.0GHz	- 1.14, 1.09, 5.03

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ SMA (J) TNC (J) PE사

□ ZVA50 (~50GHz)


10GHz Cable (CF00540-7/1)

CF00859-7/1 DATA COPY


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CF00859

Tr1 S11 SWR 500.0m/ Ref 1.000 [F2]

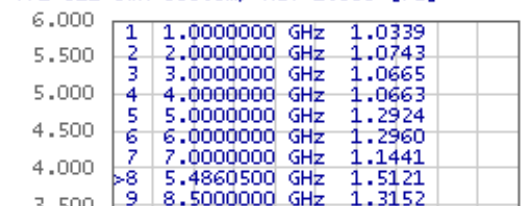

Tr2 S22 SWR 500.0m/ Ref 1.000 [F2]

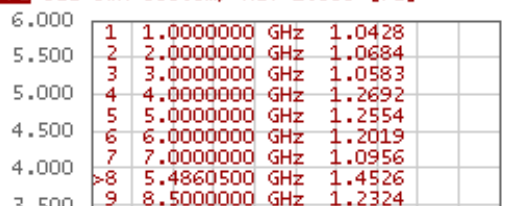

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 10 MHz

IFBW 70 kHz

Stop 8.5 GHz

Cor

Meas

Stop

ExtRef

Ready

Svc

1988-01-01 01:45

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...Multiport Test Set
Setup

Misc Setup

Backlight

ON

Firmware
Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)