


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	M.H.SONG	I.C.KIM	2018.02.18.

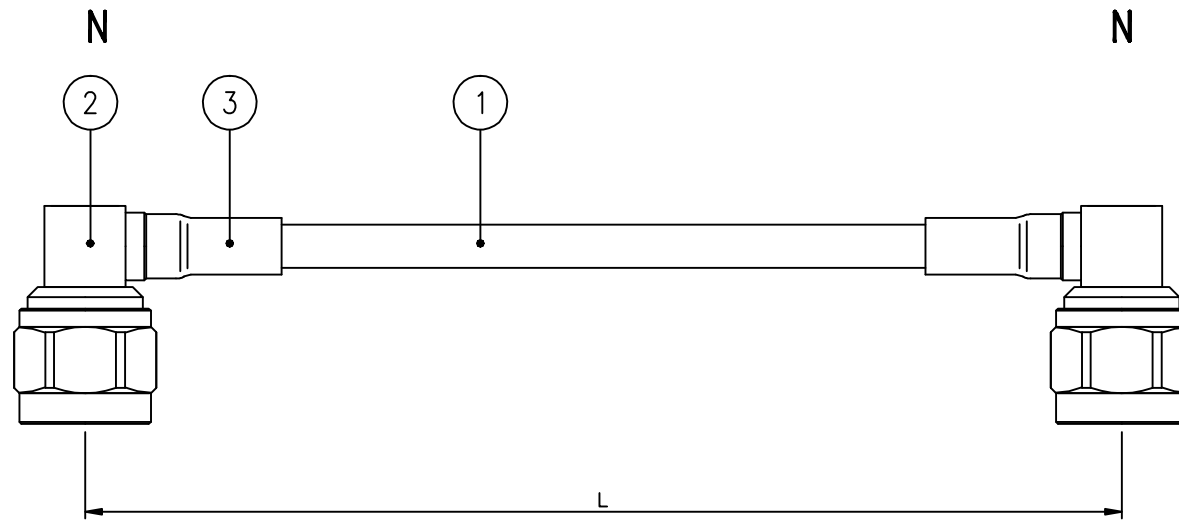

Frequency	DC ~ 6.0GHz
Impedance	50Ω (Nominal)
Insertion Loss	-1.1dB (Min)

Notes

- RoHS & Pb-FREE
- CONNECTOR MATERIAL & FINISHES
 2-1. N PL → BODY : BRASS / Nickel Plating
 CONTACT : BRASS / Gold Plating
 COUPLING CAP : BRASS / Nickel Plating
 COVER : BRASS / Nickel Plating

Customer Approval Section	
Customer Name	
Approver Name	
Date	
Signature	

CUSTOMER

CUSTOMER CODE

CABLE LENGTH TOLERANCE

0 ~ 1000mm : +5, -0
 1000 ~ 2000mm : +10, -0
 2000 ~ 3000mm : +15, -0
 3000 ~ 4000mm : +20, -0
 4000 ~ 5000mm : +25, -0
 5000 ~ : +10%

3	BONDING TUBE	2	LS TUBE	ATU00351-N/1	Ø8x20_Black
2	CONNECTOR	2	KJ COMTECH	CN01185-7/3	N50 PL
1	COAXIAL CABLE	1	EXPANTEL	ACA00041-N/1	250FJ(Blue)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
DATE			2014. 02. 18.		
APPROVED BY		I.C.KIM		 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0010 Fax : 02-02-047-0017	
CHECKED BY		E.H.KIM			
DRAWN BY		M.H.SONG		TITLE CABLE ASSEMBLY	
CHECKED BY					
SCALE	UNIT		A4	DWG NO.	CF00926-7/1
N/S	mm			DETAIL NO.	
			REVISION	I R	SHEET 1 of 1

A4