REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2014.12.29.

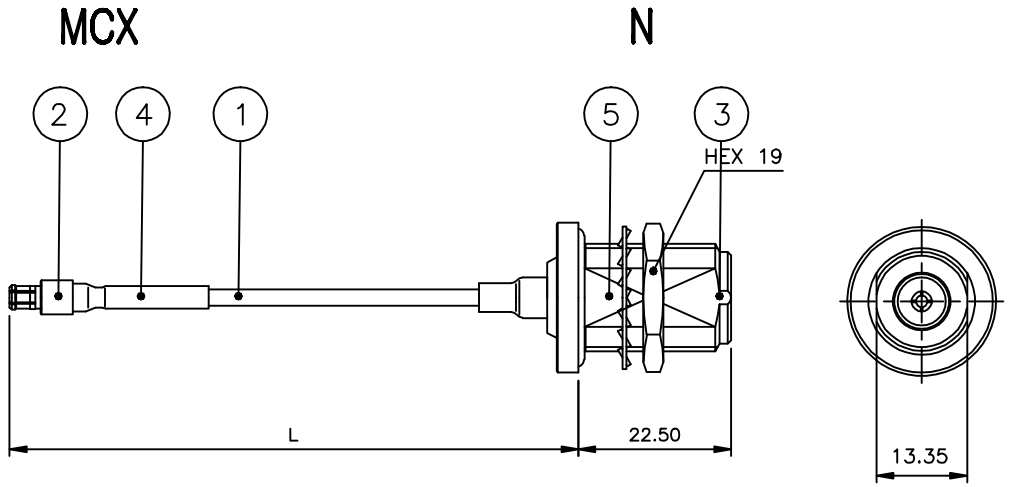

NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
5	BONDING TUBE	1	SUMITOMO	ATU0004-N/1	ø4x15 BLACK
4	SHRINK TUBE	1	SUMITOMO	ATU00056-N/1	ø4x20 BLACK
3	CONNECTOR	1	KJ COMTECH	CN02892-7/2	N50(F)BH
2	CONNECTOR	1	KJ COMTECH	CN00020-7/1	MCX(M)ST
1	COAXIAL CABLE		YEEUN	ACA000039-N/1	1671A JK (Blue)

NOTES

1. REQUIREMENTS FOR COAX CABLE:
   1.1 IMPEDANCE : 50ohm.
   1.2 ELECTRIC STRENGTH : 300V FOR 3min (RMS VALUE FOR AC).
   1.3 INSERTION LOSS < ACCORDING TABLE 1
   1.4 RETURN LOSS > 14dB at 1.55Ghz
   1.5 TEMPERATURE RANGE -40° TO +85°
   1.6 MINIMUM BEND RADIUS 30mm
2. PULL OUT FORCE : 8Kg MINIMUM
3. WATER PROOF : IP67
4. ATTACH LAMINATED LABEL WITH PRINTED IN BLACK P/N ON BONDING TUBE
5. MANUFACTURER SHALL PROVIDE A CERTIFICATE OF COMPLIANCE (COC) WITH RoHS, ALONG WITH DELIVERY
6. THE Rev. OF CABLE MUST BE THE SAME AS ORDERED.
7. WIRES AND CONNERTORS – PER PART TABLE OR SIMILAR BY CUSTOMER APPROVAL
8. WIRNIG : PIN TO PIN ASSIGNMENT.

CUSTOMER	DATE	2014. 12. 29.	
CUSTOMER CODE	APPROVED BY	I.C.KIM	
	CHECKED BY		
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	H.J.LEE	
	CHECKED BY		
	SCALE	N/S	UNIT mm

KJ COMTECH
KJ COMTECH CO.,LTD.
RF & MICROWAVE TECHNOLOGY
Tel : 82-32-847-8015
Fax : 82-32-847-8017

TITLE: CABLE ASSY

A4

DWG NO.	CF00980-7/1
DETAIL NO.	
REVISION	I R
SHEET	1 of 1