


REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
1	Initial Registration	IR	C.K.KIM	I.C.KIM	2016. 10. 12.

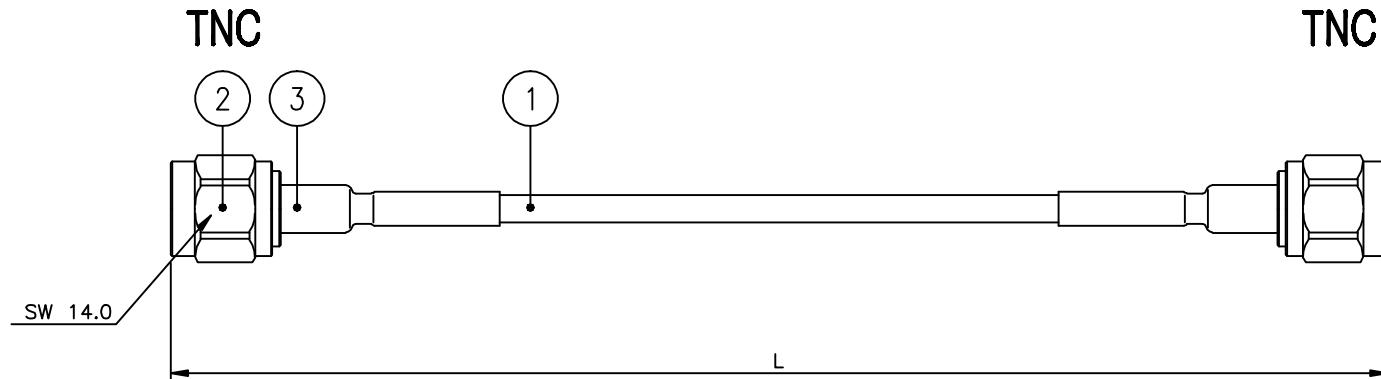


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Min) : -0.4dB
5. PIMD range : 145dBc 이상 (20W*2Tone)
[CDMA 장비 3차 기준]

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. TNC PS → ▷ BODY : SUCO 3micron Plating
 - CONTACT : Silver 5micron Plating
 - CAP : Nickel Plating

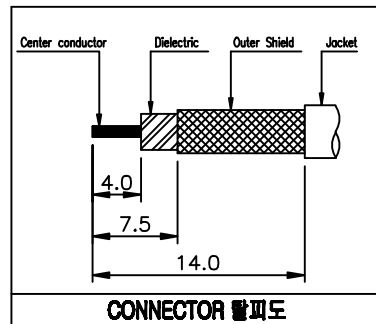

3	MARKING TUBE	2	LS TUBE	ATU00216-N/1	ø6-32mm (White)
2	CONNECTOR	2	KJ COMTECH	CN00888-7/4	TNC50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Ω) BLUE (선+ 커넥터 길이 2294mm)

CUSTOMER
CUSTOMER CODE
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%

NO.	DESCRIPTION	QTY	VENDER	PART NO.	REMARKS
DATE	2016. 10. 12.	RF & MICROWAVE TECHNOLOGY TEL : 02-02-047-0015 FAX : 02-02-047-0017			
APPROVED BY	I.C.KIM	TITLE			
CHECKED BY		DWG NO. CF01105-7/1			
DRAWN BY	C.K.KIM	DETAIL NO.			
CHECKED BY		REVISION			
SCALE	N/S	UNIT	mm	SHEET	1 of 1