
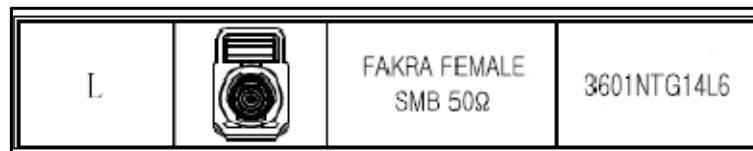
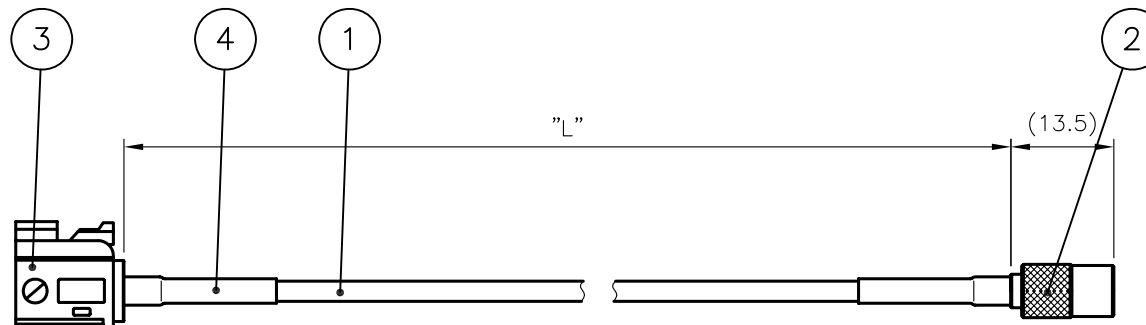


ELECTRICAL DATA :


1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : -65° C ~ 165°C



- ▶ 상대물 체결 검사 필히 할 것
 -> 상대물 CN03692-7/1 (AMBL50 PCB JB-4R)
 -> 체결 후 cap의 이동이 없을 것

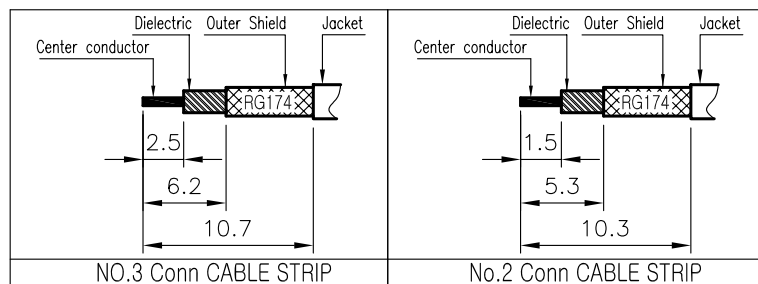

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 08. 18.

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. FAKRA Female---▶▷BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. AMBL Male---▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4-20 (Black)
3	CONNECTOR	1	KJ COMTECH	CN03693-N/3	FAKRA JS
2	CONNECTOR	1	KJ COMTECH	CN03691-7/1	AMBL PS
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE	2017. 08. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01173-7/1	
	SCALE	UNIT			DETAIL NO.		
	N/S	mm			REVISION	I R	SHEET