

ELECTRICAL DATA :



1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3

MECHANICAL DATA :

1. TEMPERATURE RANGE : -65° C ~ 165°C


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 08. 18.

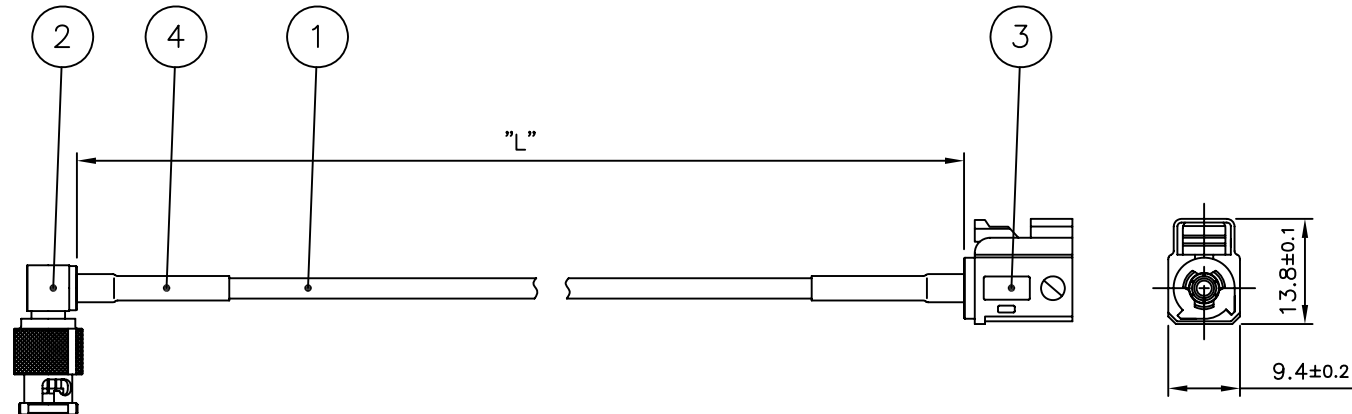


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. FAKRA Female---▶▷ BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. UM BNC Male---▶▷ BODY : Nickel Plating
CONTACT : Gold Plating

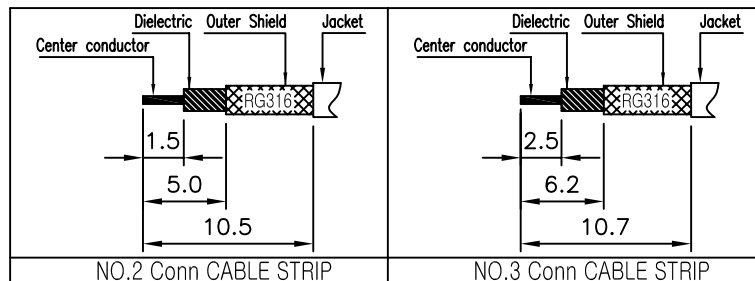

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4-20 (Black)
3	CONNECTOR	1	KJ COMTECH	CN03693-N/1	FAKRA JS
2	CONNECTOR	1	KJ COMTECH	CN03703-7/1	UM-BNC PL
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316(50Ω) (BROWN)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

CUSTOMER	DATE	2017. 08. 18.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM			
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY		TITLE CABLE ASS'Y		
	DRAWN BY	S.Y.EUN			
	CHECKED BY		DWG NO. CF01174-7/1		
	SCALE	N/S			
UNIT mm			A4	REVISION	I R
				SHEET	1 of 1