


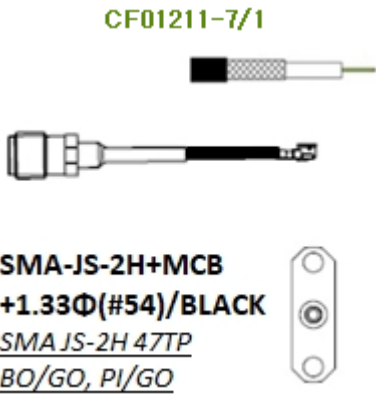

CF01211-7/1 165mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

165mm - S11/S22/S21 (SWR, SWR, dB)	
■_0.5GHz	- 1.05, 1.04, 0.21
■_1.0GHz	- 1.08, 1.08, 0.32
■_1.5GHz	- 1.07, 1.09, 0.42
■_2.0GHz	- 1.11, 1.10, 0.50

■_3.0GHz	- 1.33, 1.30, 0.71
■_4.0GHz	- 1.14, 1.13, 0.74
■_5.0GHz	- 1.34, 1.55, 0.94
■_6.0GHz	- 1.52, 2.00, 1.13
■_8.5GHz	- 1.96, 2.00, 1.80

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

- E5071B (~8.5GHz)
- ZVA50 (~50GHz)

- N Male to SMA Male
- 10GHz Cable (CF00540-7/1)

- SMA (P) UFL (P) ST
- AD00336-7/1

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

