


CF01301-7/1

BODY/CAP-GASKET

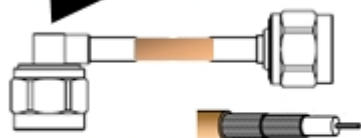

N-PL+N-PS+RG142

N PL

BO/Ni PI/Go HEX-CAP/BR/NI

N PS

BO/Ni PI/Go HEX-CAP/BR/NI

CF01301-7/1 7.62M

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

7.62M - S11/S22/S21
(SWR, SWR, dB)

■_1.0GHz	- 1.03, 1.05, 3.33
■_2.0GHz	- 1.03, 1.03, 4.92
■_3.0GHz	- 1.06, 1.08, 6.22
■_4.0GHz	- 1.06, 1.14, 7.37

■_5.0GHz	- 1.10, 1.31, 8.47
■_6.0GHz	- 1.14, 1.28, 9.44
■_7.0GHz	- 1.04, 1.11, 10.30
■_8.0GHz	- 1.10, 1.17, 11.67

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

■ N (J) N (J) AD00379-7/2

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

