


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~2GHz
3. VSWR (Max) : 1.2


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.01.15.

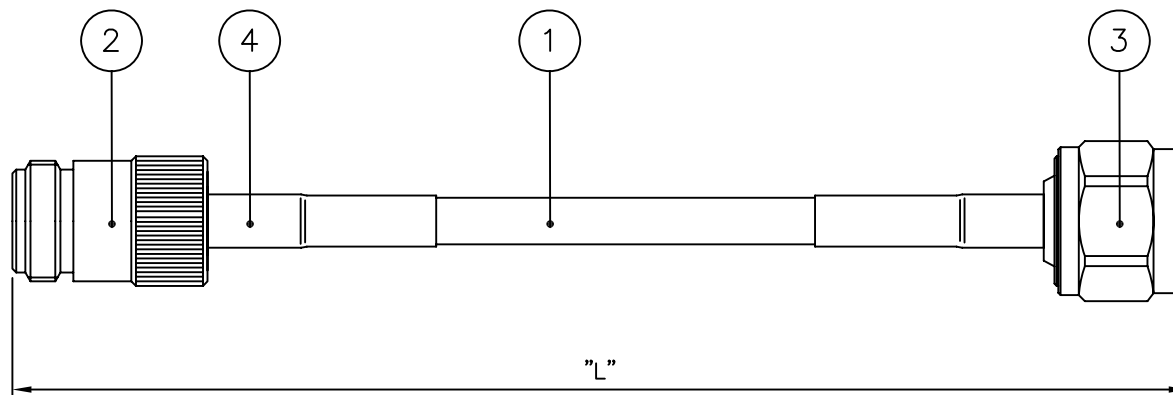


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. N50 JS-----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
 - 2-2. N50 PS-----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
COUPLING CAP : Nickel Plating

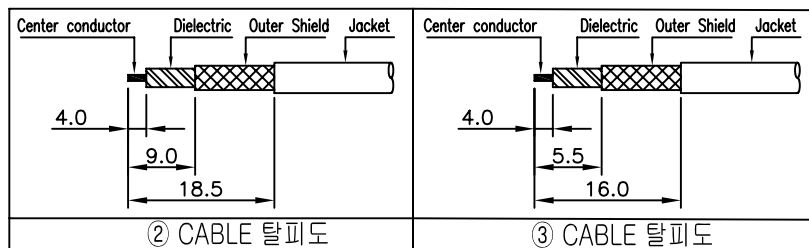

4	SHRINK TUBE	2	LS TUBE	ATU00263-N/1	φ10 (YELLOW)
3	CONNECTOR	1	KJ COMTECH	CN02953-7/1	N50 PS
2	CONNECTOR	1	KJ COMTECH	CN03698-7/2	N50 JS
1	COAXIAL CABLE		COAX PARK	ACA00072-N/1	LMR300(50Ω) (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE	2019. 01. 15.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.			
CUSTOMER CODE	APPROVED BY	I.C.KIM		TITLE CABLE ASS'Y			
	CHECKED BY						
	DRAWN BY	S.Y.EUN					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4			
	SCALE	UNIT		DWG NO.			CF01303-7/1
	N/S	mm		DETAIL NO.			
				REVISION			I R
				SHEET			1 of 1

