
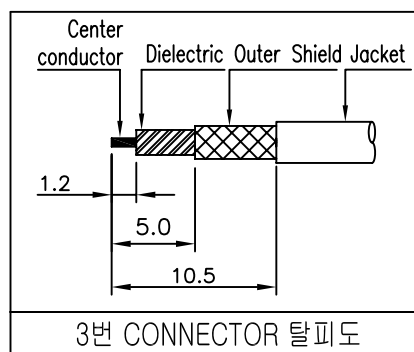


A schematic diagram of a piezoelectric actuator assembly. The assembly consists of a piezoelectric actuator (1) connected to a piezoelectric transducer (2) and a piezoelectric sensor (3). A piezoelectric transducer (4) is also shown. The distance between the piezoelectric actuator and the piezoelectric sensor is labeled "L".

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS---▶▷ BODY : Gold Plating
CONTACT : Gold Plating
CAP : Gold Plating
 - 2-2. SMB PL---▶▷ BODY : Gold Plating (무광)
CONTACT : Gold Plating
COVER : Gold Plating (무광)

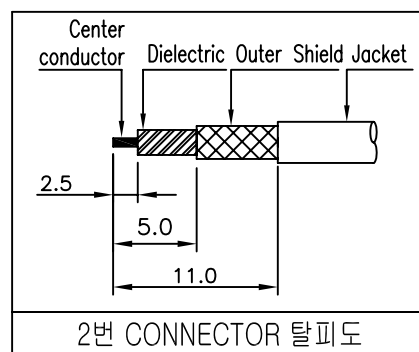

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	ø4-20 (BLACK)
3	CONNECTOR	1	KJ COMTECH	CN00207-7/3	SMB50 PL
2	CONNECTOR	1	KJ COMTECH	CN00962-7/4	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00048-N/1	RG316 (50Ω) (BROWN)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 01. 30.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM		 TITLE CABLE ASS'Y		
	CHECKED BY					
CABLE LENGTH TOLERANCE	DRAWN BY	S.Y.EUN				
0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4 DWG NO. CF01344-7/1 DETAIL NO.		
	SCALE	UNIT				
	N/S	mm		REVISION I R SHEET 1 of 1		