


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4.8GHz
3. VSWR : 1.2(Max)
4. INSERTION LOSS : 1.5dB(Max)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.04.08.

* PIPE 압착X, 본딩튜브 작업 할 것

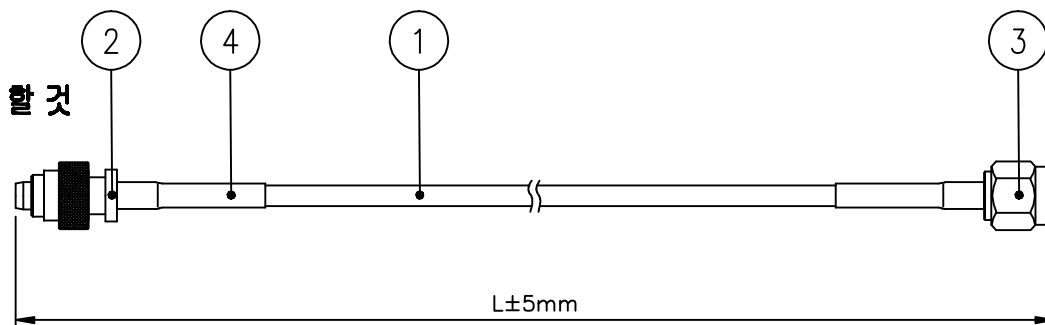


Notes


1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. SMD PS → BODY : Nickel Plating
CONTACT : Gold Plating
CAP: Nickel Plating
- 2-2. SMA PS → BODY : Gold Plating
CONTACT : Gold Plating
CAP: Nickel Plating

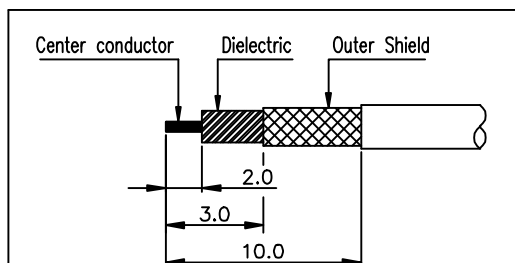

2번 CONNECTOR 탈피도

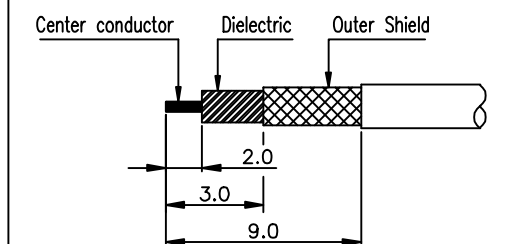

3번 CONNECTOR 탈피도

4	BONDING TUBE	2	LS TUBE	ATU00004-N/1	Ø4 - 20mm (BLACK)
3	CONNECTOR	1	KJ COMTECH	CN02796-7/2	SMA50 PS
2	CONNECTOR	1	KJ COMTECH	CN02814-7/4	SMD50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00043-N/1	MF85(50Ω) (BLUE)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2019. 04. 08.			 KF & MICROWAVE TECHNOLOGY Tel : 82-82-947-0916 Fax : 82-82-947-0917 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			DWG NO. CF01372-7/1		
	SCALE	UNIT				
	N/S	mm		REVISION	I R	SHEET



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017