


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2017. 05. 09.

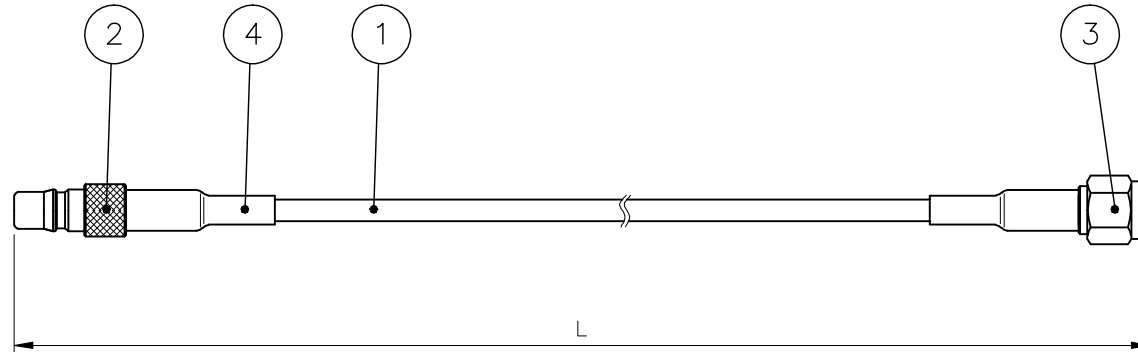

MARKER(MHz)	Insertion Loss(S21) *Loss 편차 ±0.05 이내
700	-0.19±0.05
800	-0.21±0.05
900	-0.23±0.05
1400	-0.31±0.05
1700	-0.37±0.05
2300	-0.49±0.05
2500	-0.50±0.05
2600	-0.52±0.05

Center conductor	Dielectric	Outer Shield	Jacket
3.5	6.5	12.5	
2.5	4.8	11.0	
2번 Conn CABLE 탈피도			
3번 Conn CABLE 탈피도			

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. KQMA50 JS → BODY : Nickel Plating
CONTACT : Gold Plating
2-2. SMA50 PS → BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2017. 05. 09.			 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
	CHECKED BY			TITLE CABLE ASS'Y			
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.Y.EUN					
	CHECKED BY						
	SCALE	UNIT		A4	DWG NO.	CF01443-7/1	
	N/S	mm			DETAIL NO.		
					REVISION	I R	SHEET 1 of 1

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4 Black - 20mm
3	CONNECTOR	1	KJ COMTECH	CN00901-7/1	SMA-PS
2	CONNECTOR	1	KJ COMTECH	CN03696-7/1	KQMA-JS
1	COAXIAL CABLE		FUJIKURA	ACA00210-N/1	FUJIKURA EM-1.5D-HQEW (외경 1.5mm, 길이 1000mm)



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017

TITLE CABLE ASS'Y

DWG NO. CF01443-7/1

DETAIL NO.

REVISION I R SHEET 1 of 1